

SPECIFICATIONS

Housing: Heavy duty die cast aluminum construction with corrosion resistant hardware. See finish note.

Door Frame: Heavy duty die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

Lens: Impact resistant tempered frosted glass, silicone caulked to door frame.

Reflector: Anodized aluminum, designed for maximum efficiency.

Ballast: Pre-wired C.W.A., H.P.F. core and coil with capacitor.

Lamp: Clear mogul base, (by others).


Lamp Holder: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

Finish: Dark Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

Photometric Information: Contact factory.

Labels: U/L, CU/L listed suitable for wet location. I.B.E.W. labeled.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

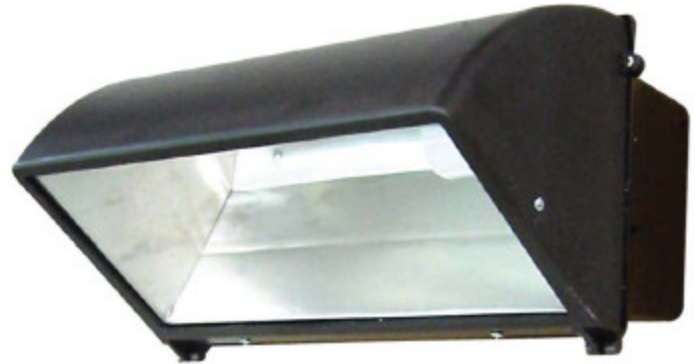

APPLICATIONS

Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

DIMENSIONS

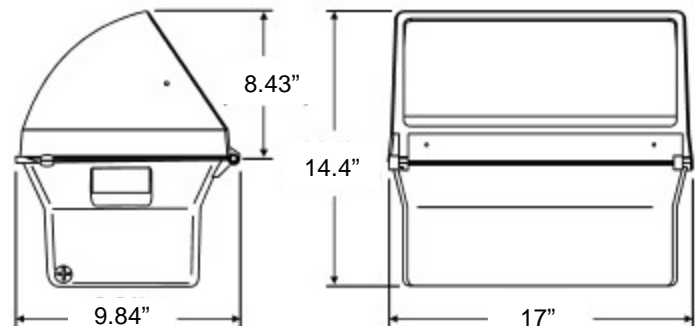

HOW TO ORDER

Catalog Number	Watts	Light Source
GSM76817	250	HPS
GSM76818	400	HPS
GSM76825	250	MH
GSM768225	250	MH Pulse Start
GSM768232	320	MH Pulse Start
GSM768235	350	MH Pulse Start
GSM76828	400	MH

OPTIONS AND ACCESSORIES



Vandal Shield
Option Cat.#
WP768VS

Wire Guard Option
Cat.# WP768WG

Visor Option
Cat.# WP768V



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975

