

SPECIFICATIONS

Housing: Die cast aluminum housing and door powder coat finished architectural bronze (contact factory for other colors). Stippled one piece aluminum reflector (contact factory for photometric information). Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.

Lens: Impact resistant borosilicate glass refractor, silicone caulked to door frame.

Ballast: H.I.D., prewired C.W.A., H.P.F. core and coil with capacitor and starter for HPS.

Mounting System: *EZ5 Mounting System allows the contractor to install the fixture in 5 minutes or less (see illustration).

Lamp: Clear or phosphor coated (by others).

Labels: ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory.



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Application: Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

Surface Power Supply Installation: Factory installed 12 gauge steel wall mounting brackets with 4 keyhole slots, finished the same as the housing. Cardboard template for locating the mounting brackets. Factory installed junction splice box, tapped for either 1/2" or 3/4" (must specify) liquid-tight connector suitable for wet location.






STEP 1. Mark wall with supplied template.

STEP 2. Start fasteners in wall.

STEP 3. Hang wall pack using keyhole slots.

STEP 4. Secure to wall.

STEP 5. Connect wall pack external j-box.

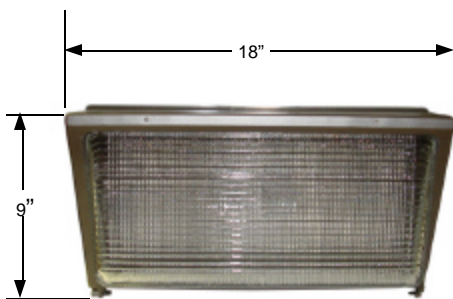

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975



HOW TO ORDER

Catalog Number	Watts	Light Source
WPS17BZ	250W	High Pressure Sodium
WPS18BZ	400W	High Pressure Sodium
WPS25BZ	150W	Metal Halide Pulse Start
WPS217BZ	175W	Metal Halide Pulse Start
WPS225BZ	250W	Metal Halide Pulse Start
WPS240BZ	400W	Metal Halide Pulse Start

ACCESSORIES



Photo Control
 Suffix Cat.# With

- 120 Volt =PC1
- 208-277 Volt =PC2
- 480 Volt =PC3

Fuse and Fuse Holder
 Suffix Catalog Number With "F"



Wireguard
 Suffix Catalog Number With "WGP2"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
 Established 1975

