



SPECIFICATIONS

Housing: Heavy duty die cast aluminum construction with corrosion resistant stainless steel hardware. Weatherproof durable silicone gaskets seal out water and bugs. See finish note.

Lens: Impact resistant tempered glass lens.

Reflector: Aluminum painted reflective white.

Optical System: 3800 lumens, 75 lumens per watt efficacy, CRI 72+, 4700K, input voltage range 120-277V, 48 system watts, -22°F (-30°C) minimum start up temperature.

Finish: Dark Architectural Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

Optional Mounting Systems: Four mounting systems, trunnion, adjustable slip fitter, 6 inch arm and adjustable NPS with threaded end.

Photometric Information: Contact factory.

Labels: UL, CUL listed, IP65 listed suitable for wet location, I.B.E.W. labeled.



Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. The lighting system is warranted for five years, when properly installed and under normal conditions of use. Warranty does not cover lens. See General Terms and Conditions.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE




Applications: Ideal for signage or general illumination.

DIMENSIONS

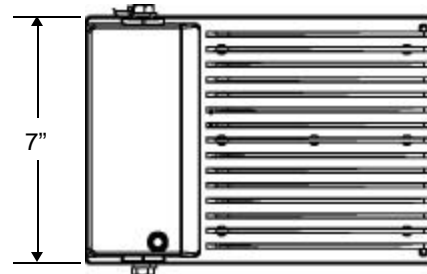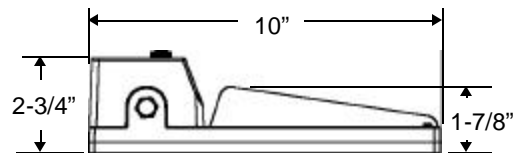

PHOTOMETRICS

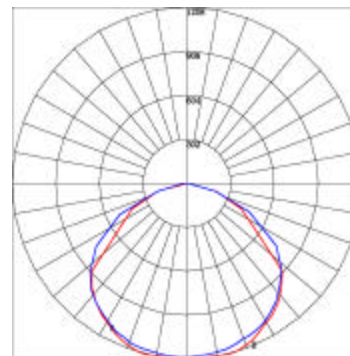

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975










HOW TO ORDER



Catalog Number	Number of LEDs	Lumens	System Watts	CRI	CCT
FLL1571	20 CREE	3800	48	72	4700K

EXAMPLE: FLL1571TPC = 3800 Lumen LED floodlight, trunnion mount and photo control.

OPTIONS AND ACCESSORIES

Mounting Options	
	6 Inch Arm mount Suffix Catalog number with AAB Example: FLL1571 becomes FLL1571AAB
	Adjustable Slip Fitter Mount Suffix Catalog number with SAB Example: FLL1571 becomes FLL1571SAB
	Adjustable NPS Mount Suffix Catalog number with NAB Example: FLL1571 becomes FLL1571NAB
	Trunnion Mount Suffix Catalog number with T Example: FLL1571 becomes FLL1571T
Other	
	Photo Control Suffix Catalog number with PC Example: FLL1571 becomes : FLL1571PC



WBE City of Chicago Certified
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

