



**SPECIFICATIONS**

**Ballast Housing:** Die cast aluminum disc shaped housing twist locks and screw tightens to reflector collar. Internal induction generator. See finish note.

**Reflector:** Open 12-1/2" diameter anodized aluminum reflector.

**Ballast:** Induction high frequency electronic ballast 120V-277V.

**Lamp:** Circular induction electrodeless fluorescent lamp with average rated life of 100,000 hours.

**Hook Mount Standard:** Die cast hook with safety screw. Finished to match housing.

**Optional Canopy Set:** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2A accessory. Finished to match housing.\*\*

**Finish:** Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard color is white.

**Labels:** Suitable for damp location. ETL, CE TL and I.B. E.W. labeled.

**Fixture Warranty:** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See general terms and conditions.


**Photometric Information:** Contact factory.

\*\*Canopy set for indoor applications only; contact factory for other applications and designs.

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**



**Dimensions**

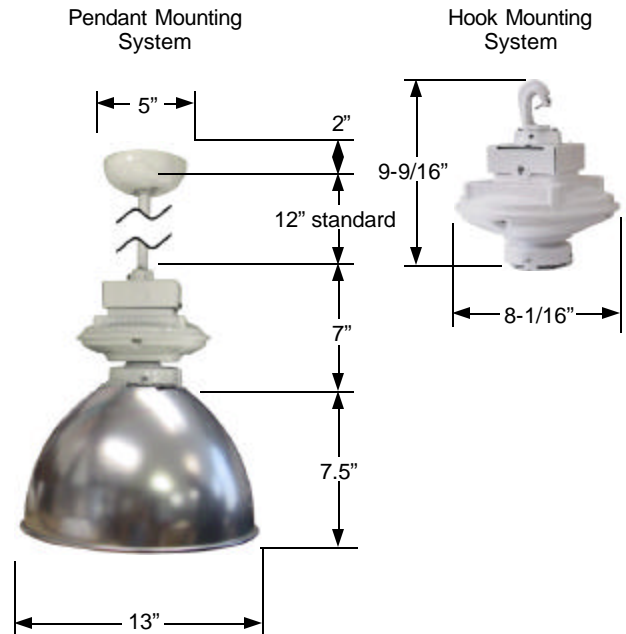

**WBE City of Chicago Certified**  
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**





## HOW TO ORDER

### Aluminum Reflector

Catalog Number	Wattage	Initial Lumens	Efficacy (Lm/W)	Color Temp
Fi8135	40	2800-3000	70-75	3500K
Fi8141	40	2800-3000	70-75	4100K
Fi8150	40	2800-3000	70-75	5000K
Fi8335	70	4900-5250	70-75	3500K
Fi8341	70	4900-5250	70-75	4100K
Fi8350	70	4900-5250	70-75	5000K
Fi8435	80	6000-6400	75-80	3500K
Fi8441	80	6000-6400	75-80	4100K
Fi8450	80	6000-6400	75-80	5000K
Fi8535	100	7500-8000	75-80	3500K
Fi8541	100	7500-8000	75-80	4100K
Fi8550	100	7500-8000	75-80	5000K



### Hook Mount Cordsets

Catalog Suffix	Voltage	NEMA Configuration
HP-1	120	L5-15
HP-2	208/240	L6-15
HP-3	277	L7-15

**EXAMPLE ORDER NUMBER: Fi8550FHP-1** = 100 watt induction system , 5000k, aluminum reflector, fuse and fuse holder, hook mount with a 120v L5-15 cordset.

## OPTIONS & ACCESSORIES

**Fuse and Fuse Holder**  
 Suffix Catalog Number With F



### Pendant Mount Suffix

P2A=12" long stem (standard)  
 P2AX= "X" is stem length other than 12".



**WBE City of Chicago Certified**  
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**

