

### Specifications

**Mounting Frame:** 18 gauge (.048") galvanized steel die formed universal mounting frame fits most ceiling systems; minimum 1/2", maximum, 2" thick. Thru way splice box.

**Reflector:** Spun aluminum #3002, .050" thick specular finish. Consult factory for other finishes.

**Ballast:** Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

**Reflector Top:** Extruded aluminum, supports socket. Dissipates heat from lamp and socket.

**Lamp:** Compact fluorescent PLT lamp max. 57W, 4 pin base (by others).

**Lamp Holder:** Vertically mounted white thermoplastic with snap-in lamp retainer springs. See table.

**Photometric Information:** Contact factory.

**Labels:** U/L, CU/L listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

### Ordering Information

RC15010T Series 10" diameter recessed open downlight.



Catalog Number	Watts	Lamp Base
<b>RC15010T3*</b>	26	GX24q-3
<b>RC15010T4*</b>	32	GX24q-3
<b>RC15010T5*</b>	42	GX24q-4
RC15010T6	57	GX24q-5

**\*QUICK SHIP PRODUCT**







RC15110T Series 10" diameter open downlight with mini-groove black baffle.



Catalog Number	Watts	Lamp Base
<b>RC15110T3*</b>	26	GX24q-3
<b>RC15110T4*</b>	32	GX24q-3
<b>RC15110T5*</b>	42	GX24q-4
RC15110T6	57	GX24q-5


**\*QUICK SHIP PRODUCT**



<p>RC15210T Series 10" diameter downlight with Corning #73 tempered prismatic glass lens.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15210T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15210T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15210T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15210T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15210T3	26	GX24q-3	RC15210T4	32	GX24q-3	RC15210T5	42	GX24q-4	RC15210T6	57	GX24q-5	<p>RC15310T Series 10" diameter downlight with flat fresnel glass lens.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15310T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15310T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15310T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15310T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15310T3	26	GX24q-3	RC15310T4	32	GX24q-3	RC15310T5	42	GX24q-4	RC15310T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15210T3	26	GX24q-3																															
RC15210T4	32	GX24q-3																															
RC15210T5	42	GX24q-4																															
RC15210T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15310T3	26	GX24q-3																															
RC15310T4	32	GX24q-3																															
RC15310T5	42	GX24q-4																															
RC15310T6	57	GX24q-5																															
<p>RC15510T Series 10" diameter downlight with Corning #73 tempered prismatic glass lens and splayed stepped baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15510T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15510T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15510T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15510T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15510T3	26	GX24q-3	RC15510T4	32	GX24q-3	RC15510T5	42	GX24q-4	RC15510T6	57	GX24q-5	<p>RC15610T Series 10" diameter downlight with flat fresnel glass lens and splayed stepped baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15610T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15610T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15610T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15610T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15610T3	26	GX24q-3	RC15610T4	32	GX24q-3	RC15610T5	42	GX24q-4	RC15610T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15510T3	26	GX24q-3																															
RC15510T4	32	GX24q-3																															
RC15510T5	42	GX24q-4																															
RC15510T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15610T3	26	GX24q-3																															
RC15610T4	32	GX24q-3																															
RC15610T5	42	GX24q-4																															
RC15610T6	57	GX24q-5																															
<p>RC15810T Series 10" diameter downlight with Corning #73 tempered prismatic glass lens and splayed white baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15810T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15810T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15810T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15810T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15810T3	26	GX24q-3	RC15810T4	32	GX24q-3	RC15810T5	42	GX24q-4	RC15810T6	57	GX24q-5	<p>RC15910T Series 10" diameter downlight with flat fresnel glass lens and splayed white baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15910T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15910T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15910T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15910T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15910T3	26	GX24q-3	RC15910T4	32	GX24q-3	RC15910T5	42	GX24q-4	RC15910T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15810T3	26	GX24q-3																															
RC15810T4	32	GX24q-3																															
RC15810T5	42	GX24q-4																															
RC15810T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15910T3	26	GX24q-3																															
RC15910T4	32	GX24q-3																															
RC15910T5	42	GX24q-4																															
RC15910T6	57	GX24q-5																															

### Dimensions

#### RC15010T Series 10" Diameter Single Vertical Lamp PLT26W, 32W, 42W or 57W

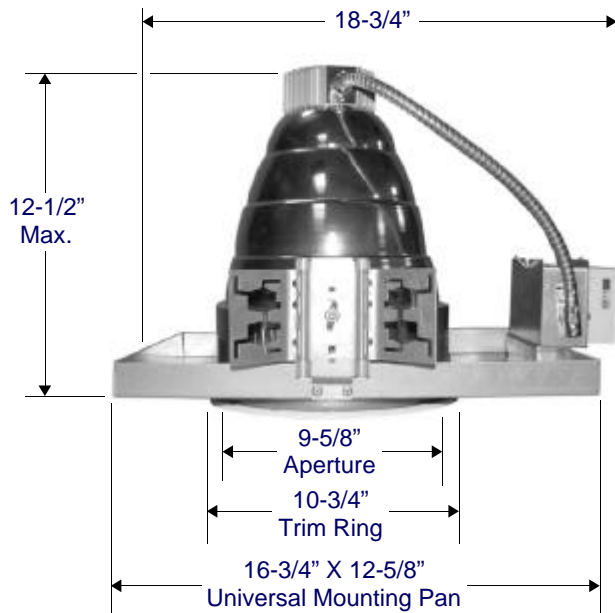

### RC15010T Series Recessed Architectural Downlight Options & Accessories



Option	Suffix catalog number with
Dimming Ballast	DM
Emergency Ballast	EM

