

Specifications

Mounting Frame: 18 gauge (.048") galvanized steel die formed universal mounting frame fits most ceiling systems; minimum 1/2", maximum, 2" thick. Thru way splice box.

Reflector: Spun aluminum #3002, .050" thick specular finish. Consult factory for other finishes.

Ballast: Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

Reflector Top: Extruded aluminum, supports socket. Dissipates heat from lamp and socket.

Lamp: Compact fluorescent PLT lamp max. 57W, 4 pin base (by others).

Lamp Holder: Vertically mounted white thermoplastic with snap-in lamp retainer springs. See table.

Photometric Information: Contact factory.

Labels: U/L, CU/L listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Ordering Information

RC15010T Series 10" diameter recessed open downlight.



Catalog Number	Watts	Lamp Base
RC15010T3*	26	GX24q-3
RC15010T4*	32	GX24q-3
RC15010T5*	42	GX24q-4
RC15010T6	57	GX24q-5

***QUICK SHIP PRODUCT**







RC15110T Series 10" diameter open downlight with mini-groove black baffle.



Catalog Number	Watts	Lamp Base
RC15110T3*	26	GX24q-3
RC15110T4*	32	GX24q-3
RC15110T5*	42	GX24q-4
RC15110T6	57	GX24q-5


***QUICK SHIP PRODUCT**



<p>RC15210T Series 10" diameter downlight with Corning #73 tempered prismatic glass lens.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15210T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15210T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15210T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15210T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15210T3	26	GX24q-3	RC15210T4	32	GX24q-3	RC15210T5	42	GX24q-4	RC15210T6	57	GX24q-5	<p>RC15310T Series 10" diameter downlight with flat fresnel glass lens.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15310T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15310T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15310T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15310T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15310T3	26	GX24q-3	RC15310T4	32	GX24q-3	RC15310T5	42	GX24q-4	RC15310T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15210T3	26	GX24q-3																															
RC15210T4	32	GX24q-3																															
RC15210T5	42	GX24q-4																															
RC15210T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15310T3	26	GX24q-3																															
RC15310T4	32	GX24q-3																															
RC15310T5	42	GX24q-4																															
RC15310T6	57	GX24q-5																															
<p>RC15510T Series 10" diameter downlight with Corning #73 tempered prismatic glass lens and splayed stepped baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15510T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15510T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15510T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15510T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15510T3	26	GX24q-3	RC15510T4	32	GX24q-3	RC15510T5	42	GX24q-4	RC15510T6	57	GX24q-5	<p>RC15610T Series 10" diameter downlight with flat fresnel glass lens and splayed stepped baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15610T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15610T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15610T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15610T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15610T3	26	GX24q-3	RC15610T4	32	GX24q-3	RC15610T5	42	GX24q-4	RC15610T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15510T3	26	GX24q-3																															
RC15510T4	32	GX24q-3																															
RC15510T5	42	GX24q-4																															
RC15510T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15610T3	26	GX24q-3																															
RC15610T4	32	GX24q-3																															
RC15610T5	42	GX24q-4																															
RC15610T6	57	GX24q-5																															
<p>RC15810T Series 10" diameter downlight with Corning #73 tempered prismatic glass lens and splayed white baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15810T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15810T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15810T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15810T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15810T3	26	GX24q-3	RC15810T4	32	GX24q-3	RC15810T5	42	GX24q-4	RC15810T6	57	GX24q-5	<p>RC15910T Series 10" diameter downlight with flat fresnel glass lens and splayed white baffle.</p> 	<table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Watts</th> <th>Lamp Base</th> </tr> </thead> <tbody> <tr> <td>RC15910T3</td> <td>26</td> <td>GX24q-3</td> </tr> <tr> <td>RC15910T4</td> <td>32</td> <td>GX24q-3</td> </tr> <tr> <td>RC15910T5</td> <td>42</td> <td>GX24q-4</td> </tr> <tr> <td>RC15910T6</td> <td>57</td> <td>GX24q-5</td> </tr> </tbody> </table>	Catalog Number	Watts	Lamp Base	RC15910T3	26	GX24q-3	RC15910T4	32	GX24q-3	RC15910T5	42	GX24q-4	RC15910T6	57	GX24q-5
Catalog Number	Watts	Lamp Base																															
RC15810T3	26	GX24q-3																															
RC15810T4	32	GX24q-3																															
RC15810T5	42	GX24q-4																															
RC15810T6	57	GX24q-5																															
Catalog Number	Watts	Lamp Base																															
RC15910T3	26	GX24q-3																															
RC15910T4	32	GX24q-3																															
RC15910T5	42	GX24q-4																															
RC15910T6	57	GX24q-5																															

Dimensions

**RC15010T Series
10" Diameter Single Vertical Lamp
PLT26W, 32W, 42W or 57W**

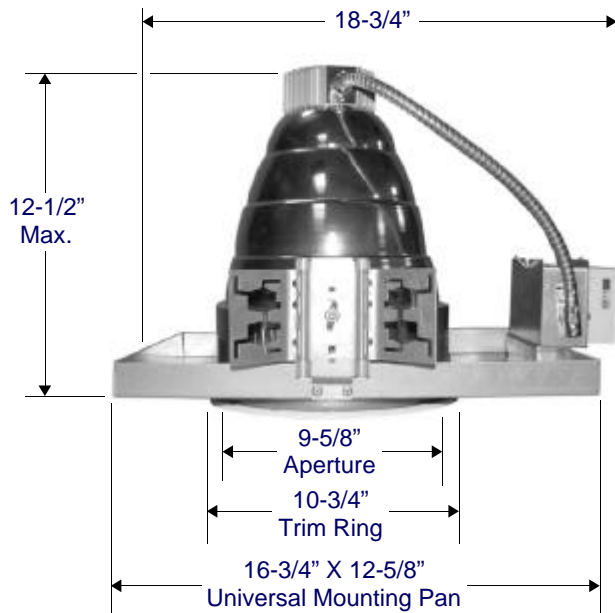

RC15010T Series Recessed Architectural Downlight Options & Accessories



Fuse and Fuse Holder
Suffix Catalog Number With "F"



Louver guard option.
Suffix Catalog Number With LG3

Option	Suffix catalog number with
Dimming Ballast	DM
Emergency Ballast	EM



Slope Adapter Option
Suffix Catalog Number With

SA310	10 Degree Slope
SA320	20 Degree Slope
SA330	30 Degree Slope