

Specifications

Reflector / Mounting Pan: 20 gauge (.036") C.R.S. Computer designed and finished high gloss white 90% reflectance polyester powder coating. See Finish Note.

Door Frame: 20 gauge (.036") C.R.S. gasketed with two captive, countersunk fasteners, concealed stainless steel hinging, painted Sky White. See Finish Note.

Ballast: H.I.D.: Pre-wired, CWA or HPF, core and coil with dry film capacitor and starter if required.

Thermal Device: Automatic resetting heat sensitive device for non-IC installations. Protects fixture from overheating if insulation covers fixture.

Lamp: H.I.D.: Clear, mogul base (by others).

Lamp Holder: H.I.D. Hi-heat porcelain, 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

Finish: All painted parts are washed in alkaline solution, rinsed in an iron phosphate, baked dry, then painted with a TGIC polyester powder coating electrostatic applied and baked.

Labels: U/L, CU/L listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.

Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

RH1000 Series 2x2 lay-in with C73 prismatic tempered glass lens.		Catalog Number	Watts	Light Source
		RH1015	150	HPS
		RH1017	250	HPS
		RH1018	400	HPS
		RH1026*	175	MH
		RH1027*	250	MH
		RH10225	250	MH/PS
		RH10232	320	MH/PS
		RH10235	350	MH/PS
		RH1028*	400	MH
		RH10240	400	MH/PS


***QUICK SHIP PRODUCT**

RH1100 Series 2x2 lay-in with regressed C73 prismatic tempered glass lens.		Catalog Number	Watts	Light Source
		RH1115	150	HPS
		RH1117	250	HPS
		RH1118	400	HPS
		RH1126*	175	MH
		RH1127*	250	MH
		RH11225	250	MH/PS
		RH11232	320	MH/PS
		RH11235	350	MH/PS
		RH1128*	400	MH
		RH11240	400	MH/PS

***QUICK SHIP PRODUCT**




RH1200 Series 2x2 lay-in with acrylic prismatic drop lens.



Catalog Number	Watts	Light Source
RH1215	150	HPS
RH1217	250	HPS
RH1218	400	HPS
RH1226*	175	MH
RH1227*	250	MH
RH12225	250	MH/PS
RH12232	320	MH/PS
RH12235	350	MH/PS
RH1228*	400	MH
RH12240	400	MH/PS

***QUICK SHIP PRODUCT**


RH1300 Series 2x2 lay-in with polycarbonate prismatic drop lens.



Catalog Number	Watts	Light Source
RH1315	150	HPS
RH1317	250	HPS
RH1318	400	HPS
RH1326*	175	MH
RH1327*	250	MH
RH13225	250	MH/PS
RH13232	320	MH/PS
RH13235	350	MH/PS
RH1328*	400	MH
RH13240	400	MH/PS


***QUICK SHIP PRODUCT**

RH1400 Series 2x2 lay-in with C73 prismatic tempered glass lens and 16 cell parabolic louver.



Catalog Number	Watts	Light Source
RH1415	150	HPS
RH1417	250	HPS
RH1418	400	HPS
RH1426	175	MH
RH1427	250	MH
RH14225	250	MH/PS
RH14232	320	MH/PS
RH14235	350	MH/PS
RH1428	400	MH
RH14240	400	MH/PS

RH1600 Series 2x2 lay-in with C73 prismatic tempered glass lens and 9 cell parabolic louver.

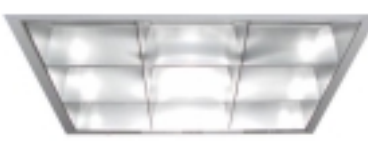

Catalog Number	Watts	Light Source
RH1615	150	HPS
RH1617	250	HPS
RH1618	400	HPS
RH1626	175	MH
RH1627	250	MH
RH16225	250	MH/PS
RH16232	320	MH/PS
RH16235	350	MH/PS
RH1628	400	MH
RH16240	400	MH/PS

RH1900 Series 2x2 lay-in with acrylic Triumph 1 control lens.



Catalog Number	Watts	Light Source
RH1915	150	HPS
RH1917	250	HPS
RH1918	400	HPS
RH1926	175	MH
RH1927	250	MH
RH19225	250	MH/PS
RH19232	320	MH/PS
RH19235	350	MH/PS
RH1928	400	MH
RH19240	400	MH/PS

Accessories




Wire guard option. Suffix catalog number with WG21.



Aluminum plaster frame simulates "Tee Bar" ceiling finished matte white. Suffix catalog number with T24W.

Dimensional Information

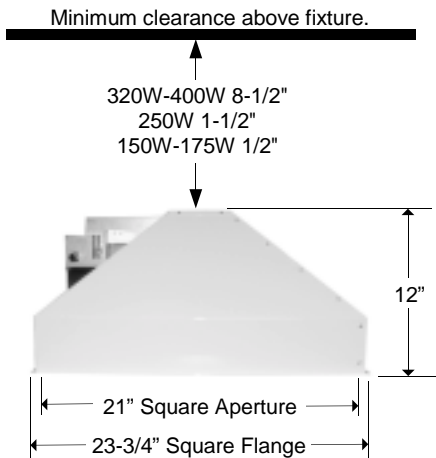

Fuse and Fuse Holder Suffix Catalog Number With "F"



Tamper proof screw option suffix catalog number with TP.

Suffix Catalog Number With	Quartz Re-strike Systems
E1A	MINI-CAN SOCKET ASSEMBLY FOR SEPARATE CIRCUIT ENTRY WITH RELAY SYSTEM FOR ONE LAMP BURNING ONLY.
E2	EMERGENCY RE-STRIKE SYSTEM, MINI-CAN SOCKET ASSEMBLY (100-250 WATT MAX LAMP).
E65	EMERGENCY RE-STRIKE SYSTEM, MINI-CAN SOCKET ASSEMBLY (100-250 WATT MAX LAMP) TIME DELAY RELAY.
E1D	RELAY FOR INCANDESCENT DIMMING SYSTEM MAX. 250W QUARTZ LAMP, MINI-CAN SOCKET ASSEMBLY