



### SPECIFICATIONS


**Housing:** Spun aluminum .090" thick. See Finish Note.  
**Reflector:** Spun aluminum .040" thick, finished bright anodized.  
**Ballast:** Philips QL induction high frequency electronic ballast 120 volt 50 or 60 Hz. Contact factory for other voltages.  
**Lamp:** Philips QL induction electrodeless fluorescent lamp with average rated life 100,000 hours.  
**Door Frame:** Spun aluminum ring, gasketed to retain lens. Torsion spring lock-up with safety chain.  
**Lens:** Prismatic acrylic, polycarbonate or heat resistant high impact borosilicate glass refractor.  
**Cross Bar:** 4" Long, tapped 3/8" I.P.S. galvanized steel. Surface mount only.  
**Quick Connect Box:** 16 Gauge (.059") galvanized steel finished to match housing. See finish note.  
**Canopy Set:** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Finished to match housing.\*\*  
**Wall Bracket Assembly:** One-piece cast aluminum bracket/arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Esco's **EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.  
**Finish:** All painted parts are washed in alkaline solution, rinsed in an iron phosphate, baked dry, then painted with a TGIC polyester powder coating electrostatic applied and baked.  
**Labels:** Surface and wall mount suitable for wet location; pendant mount suitable for damp location. ETL, CETL and I.B.E.W. labeled.  
**Photometric Information:** Contact factory.  
**Fixture Warranty:** The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.

\*\*Canopy set for indoor applications only; contact factory for other applications and designs.



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

### DIMENSIONS

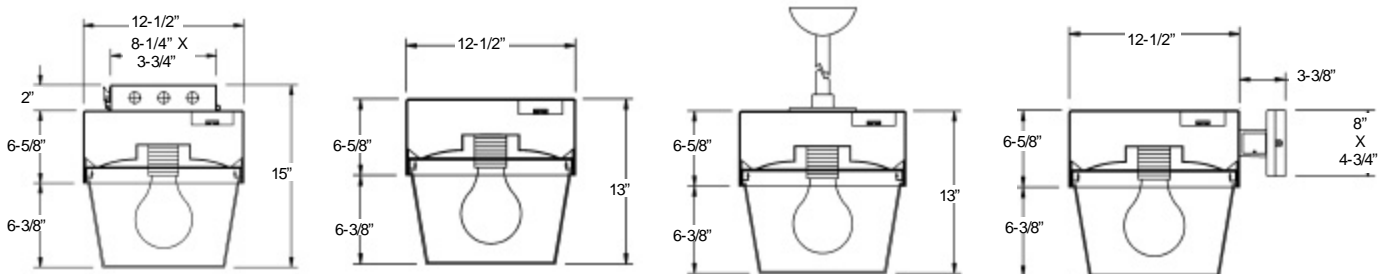

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
 Established 1975





## HOW TO ORDER

Prismatic Acrylic	Mounting System	Lamps	Color Temp	Prismatic Polycarbonate	Mounting System	Lamps	Color Temp	Prismatic Borosilicate Glass	Mounting System	Lamps	Color Temp
S40730	Surface	55w	3000k	S41730	Surface	55w	3000k	S42730	Surface	55w	3000k
S40740	Surface	55w	4000K	S41740	Surface	55w	4000K	S42740	Surface	55w	4000K
S40750	Surface	55w	5000K	S41750	Surface	55w	5000K	S42750	Surface	55w	5000K
S40830	Surface	85w	3000k	S41830	Surface	85w	3000k	S42830	Surface	85w	3000k
S40840	Surface	85w	4000K	S41840	Surface	85w	4000K	S42840	Surface	85w	4000K
S40850	Surface	85w	5000K	S41850	Surface	85w	5000K	S42850	Surface	85w	5000K
W40730	Wall	55w	3000k	W41730	Wall	55w	3000k	W42730	Wall	55w	3000k
W40740	Wall	55w	4000K	W41740	Wall	55w	4000K	W42740	Wall	55w	4000K
W40750	Wall	55w	5000K	W41750	Wall	55w	5000K	W42750	Wall	55w	5000K
W40830	Wall	85w	3000k	W41830	Wall	85w	3000k	W42830	Wall	85w	3000k
W40840	Wall	85w	4000K	W41840	Wall	85w	4000K	W42840	Wall	85w	4000K
W40850	Wall	85w	5000K	W41850	Wall	85w	5000K	W42850	Wall	85w	5000K



### Color Suffix

- BZ**= Textured Bronze
- BL**= Textured Black
- W**= Sky White

**Other** Consult Factory

### Mounting Options Suffix catalog number with:

- B**= Quick connect splice box.
- P2x**= Pendant and canopy mount (x = required stem length in inches).

**EXAMPLE: S42840P224BL** = Surface mount, Prismatic borosilicate lens, 85W QL induction lamp, 4000K, textured black, pendant mount with 24" stem.

## ACCESSORIES

**Fuse and Fuse Holder**  
 Suffix Catalog Number With "F"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
 Established 1975

