



SPECIFICATIONS

Mounting Frame

1' x 2' simulating steel snap-in tile 20 GA (.036") thick galvanized perforated steel with splice box. See finish note.

Reflector

Spun aluminum .040" thick #3002. Pretreated with Bonderite®1000 and Parcelene®60. Electrostatic cold sprayed with ALESTA® eggshell white epoxy, eliminates inherent lamp striations.

Reflector Top

Extruded aluminum, supports socket plate and reflector. Dissipates heat from lamp and socket.

Trim Ring

Injection molded white nylon.

Baffle

One-piece spun aluminum, mini-groove finished matte black. See finish note (Optional).

Ballast

Compact fluorescent electronic high power factor class P, Uni-

versal voltage $\pm 10\%$ 120 thru 277 volt rated line (108-305V); input frequency 50/60Hz. Programmed rapid start. ANSI C62.41 cat. A transient protection. Dynamic end-of-life sensing.

Lamp

Compact fluorescent PLT lamp max. 42W, 4 pin base (by others).

Lamp Holder

Vertically mounted white thermoplastic with snap-in lamp retainer springs.

Finish

Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard color matte white. Custom colors are available. Consult factory or sales representative.

Labels

ETL, CETL listed & I.B.E.W local 134 assembled and labeled suitable for damp

location.

Fixture Warranty

The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See General Terms and Conditions.

Photometric Information

Contact factory.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



SP2774


CFL

1' x 2' Perforated Ceiling Tile Luminaire

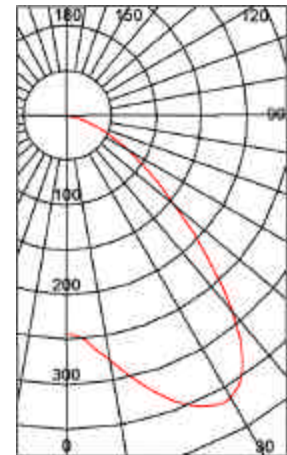

DIMENSIONS

Side View

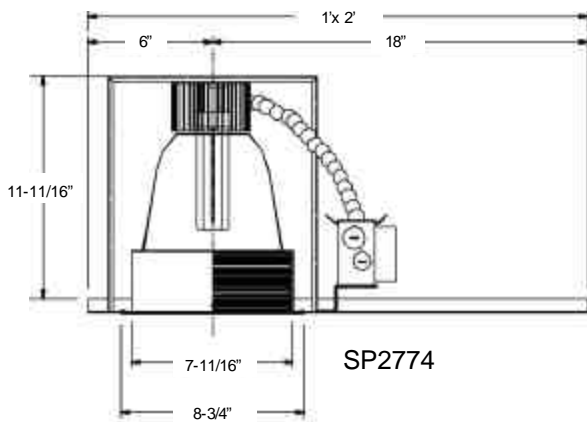

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975





HOW TO ORDER



SP2774

Catalog Number	Watts	Lamp Base	Lumens
SP27743	PLT26W	GX24q-3	1746 @ 25c° 1200 @ 35c°
SP27744	PLT32W	GX24q-3	2328 @ 25c° 2400 @ 35c°
SP27745	PLT42W	GX24q-4	3104 @ 25c° 3200 @ 35c°

OPTIONS AND ACCESSORIES



Mini-groove Black Baffle Suffix Catalog number with **BB**
Example: SP27745 becomes **WPL265BB**



Fuse and Fuse Holder* Suffix Catalog Number With **F**
Example: SP27745 becomes **SP27745F**

*120 or 277 volt must be specified when ordering Fuse and Fuse Holder.

Voltage Suffix 120v = -1, 277v = -4

EXAMPLE ORDER: SP27745BB-1 = 42 watt, mini-groove black baffle, 120 volt.