




SPECIFICATIONS

- Cylinder:** Extruded aluminum 6063-T5, .090" thick.* See finish note.
- Reflector:** Spun aluminum alloy 3002, electro-chemically processed to provide specular finish.
- Reflector Top:** Extruded aluminum, supports socket and reflector. Dissipates heat from lamp and socket.
- Ballast:** High power factor, electronic, 120V—277V class P ballast.
- Lamp:** Compact fluorescent (by others). See table.
- Lamp Holder:** Vertically mounted white thermoplastic with snap-in lamp retainer.
- Canopy Set:** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Other lengths available. Finished to match housing.*



DIMENSIONS

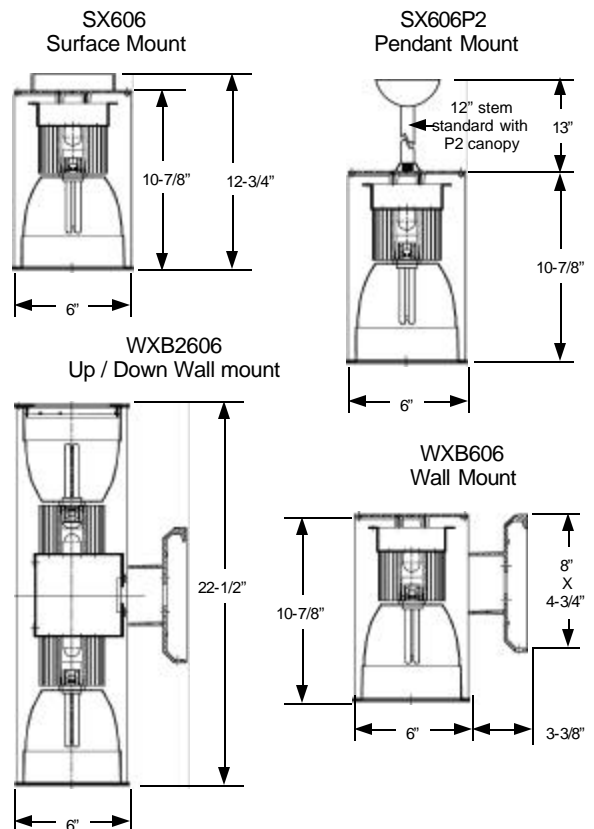

Surface Mount: Cast Aluminum 5/32" thick EZ5® splice box mounts to standard 4" octagonal junction box. Safety clip supports cylinder for hands free splice connection. Three #10-32 screws set 120° apart for twist and lock-up of cylinder to splice box. Supplied with quick-connect wiring harness. EZ5® design allows the contractor to install the fixture in 5 easy minutes or less. See illustration above. Finished same as housing. See finish note.

Wall Bracket Assembly: One-piece cast aluminum bracket /arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos EZ5® Mounting System allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

Trunion Mount: 14 Gauge (.074") steel trunion with 180° pivot, adjusting knobs lock fixture into position. Designed for direct mounting to electrical box. See finish note.

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors white or bronze. Custom colors are available. Consult factory or sales representative.

Labels: Pendant mount suitable for damp location; wall mount suitable for wet location; surface mount suitable for wet location under covered ceiling. ETL, CETL and I.B.E.W. labeled.

Fixture Warranty: The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for **ten years** from date of shipment from the factory. See General Terms and Conditions.

Photometric Information: Contact factory.

*Canopy set for indoor applications only; contact factory for other applications and designs.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975





HOW TO ORDER

Surface Mount			Color
Catalog Number	Watts	Lamp Base	Suffix Catalog Number With
SX606D1	PL13W	G24q-1	White= W
SX606D2	PL18W	G24q-2	Bronze= BZ
SX606D3	PL26W	G24q-3	Black= BL
SX606T2	PLT18W	GX24q-2	
SX606T3	PLT26W	GX24q-3	
SX606T4	PLT32W	GX24q-3	

EXAMPLE: SX616D1BLFP224 = 6" diameter cylinder, mini-groove black baffle, PL13W, fuse and fuse holder, pendant mount with 24" stem, textured black

OPTIONS AND ACCESSORIES

Aperture Accessories	
	Mini-Groove Black Baffle Replace 60 in catalog number with 61 Example: SX606T4 becomes SX616T4
	Louver Guard Suffix catalog number with LG1 Example: SX606T4 becomes SX606T4LG1
Mounting Options	
	Trunion mount Change S in catalog number to T Example: SX606T4 becomes TX606T4
	Pendant Mount Suffix P2=12" long stem (standard) P2X="X" is custom stem length Example: P224= 24" long stem
	EZ5® Wall Mount Change Prefix SX to WXB Example: SX606T4 becomes WXB606T4
	Up/Down EZ5® Wall Mount Change Prefix SX to WXB2 Example: SX606T4 becomes WXB2606T4
Ballast Options	
	Dimming Ballast Suffix catalog number with DM Example: SX606T4 becomes SX606T4DM
	Emergency Ballast Suffix catalog number with EM* *Cylinder height increases to 15-1/4" Example: SX606T4 becomes SX606T4EM
	Remote Emergency Ballast Suffix catalog number with RMEM* *Cylinder height increases to 15-1/4" Example: SX606T4 becomes SX606T4RMEM
Other	
	Photo Control Suffix Catalog number with 120 Volt = PC4 208-277 Volt = PC5 Example: SX606T4 becomes SX606T4PC5
	Fuse and Fuse Holder Suffix Catalog Number With F Example: SX606T4 becomes SX606T4F

WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
 Established 1975

