



SPECIFICATIONS

Housing: Extruded aluminum 6063-T5, .090" thick.* See finish note.
Reflector: Stamped aluminum .125" thick acts as heatsink, finished sky white, 90% reflectance.
Ballast: Induction high frequency electronic ballast 120-277 volt 50/60 Hz. Contact factory for other voltages.
Lamp: Electrodeless fluorescent bulb shaped lamp with average rated life 100,000 hours. See ordering information.
Lens Frame: Aluminum, silicone gasketed to seal out contaminants. Attached to cylinder with four stainless steel screws.
Lens: Prismatic acrylic Type V distribution, or optional heat resistant high impact borosilicate glass refractor (see table).
Canopy Set: (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Other lengths available. Finished to match housing.**



Surface Mount: Cast Aluminum 5/32" thick EZ5 splice box mounts to standard 4" octagonal junction box. Safety clip supports cylinder for hands free splice connection. Three #10-32 screws set 120° apart for twist and lock-up of cylinder to splice box. Supplied with quick-connect wiring harness. EZ5 design allows the contractor to install the fixture in 5 easy minutes or less. See illustration above. Finished same as housing. See finish note.

Wall Bracket Assembly: One-piece cast aluminum bracket /arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos EZ5 Mounting System allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors textured black, textured bronze and sky white. Custom colors are available. Consult factory or sales representative.

Labels: Surface and pendant mount suitable for damp location; wall mount suitable for wet location. ETL, CETL and I.B.E.W. labeled.

Photometric Information: Contact factory.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See general terms and conditions.***

*U.S. Patent No. D570035


**Canopy set for indoor applications only; contact factory for other applications and designs.

***Does not cover acrylic lens

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



DIMENSIONS

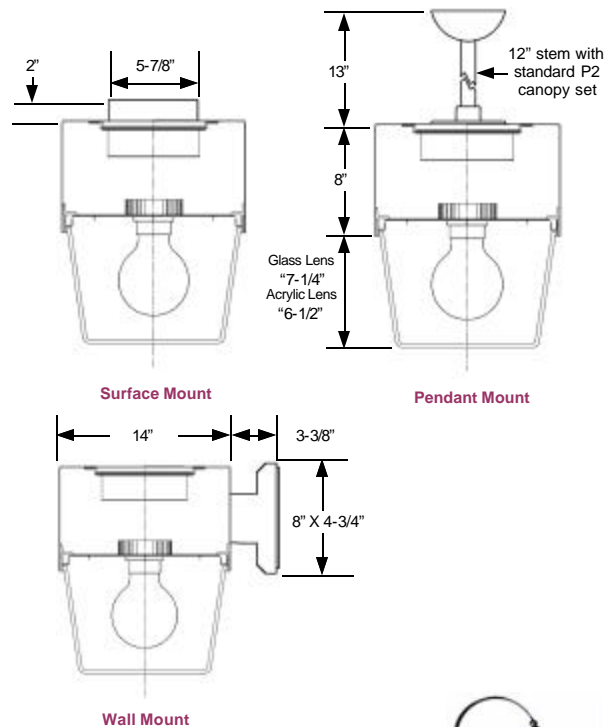



HOW TO ORDER

Prismatic Acrylic	Mounting System	Lamps	Color Temp	Initial Lumens	System Watts	Prismatic Borosilicate Glass	Mounting System	Lamps	Color Temp	Initial Lumens	System Watts
SXF405535	Surface	55w	3500K	4380	58	SXF425535	Surface	55w	3500K	4380	58
SXF405541	Surface	55w	4100K	4380	58	SXF425541	Surface	55w	4100K	4380	58
SXF405550	Surface	55w	5000K	4380	58	SXF425550	Surface	55w	5000K	4380	58
SXF408535	Surface	85w	3500K	6800	89	SXF428535	Surface	85w	3500K	6800	89
SXF408541	Surface	85w	4100K	6800	89	SXF428541	Surface	85w	4100K	6800	89
SXF408550	Surface	85w	5000K	6800	89	SXF428550	Surface	85w	5000K	6800	89

Prismatic Acrylic	Mounting System	Lamps	Color Temp	Initial Lumens	System Watts	Prismatic Borosilicate Glass	Mounting System	Lamps	Color Temp	Initial Lumens	System Watts
WXF405535	Wall Mount	55w	3500K	4380	58	WXF425535	Wall Mount	55w	3500K	4380	58
WXF405541	Wall Mount	55w	4100K	4380	58	WXF425541	Wall Mount	55w	4100K	4380	58
WXF405550	Wall Mount	55w	5000K	4380	58	WXF425550	Wall Mount	55w	5000K	4380	58
WXF408535	Wall Mount	85w	3500K	6800	89	WXF428535	Wall Mount	85w	3500K	6800	89
WXF408541	Wall Mount	85w	4100K	6800	89	WXF428541	Wall Mount	85w	4100K	6800	89
WXF408550	Wall Mount	85w	5000K	6800	89	WXF428550	Wall Mount	85w	5000K	6800	89

Color Suffix

BZ=Textured Bronze	W=Sky White
BL=Textured Black	Other=Consult Factory

Voltage Suffix

1= 120V
4= 277V

EXAMPLE: SXF428550BLP224-1 = 85W induction lamp, 5000K, prismatic borosilicate glass lens, pendant mount with 24" stem, textured black, 120 volt.

ACCESSORIES

Pendant Mount Suffix

P2=12" long stem standard
 (14" overall canopy set length)
P2X="X" is custom stem
 length
EXAMPLE: P224= 24" long
 stem.



Photo Control*

Suffix Catalog # With

PC4 =120 Volt

PC5 =277 Volt



Fuse and Fuse Holder*

Suffix Catalog Number With F



*120 or 277 volt must be specified when ordering a Photo Control or Fuse and Fuse Holder.



WBE City of Chicago Certified

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

