



**SPECIFICATIONS**

**Cylinder:** Extruded aluminum 6063-T5, .090" thick.\* See finish note.

**Reflector** Spun aluminum alloy 3002. Electro-chemically processed to provide specular finish.

**Lamp** Incandescent, up to 300w PAR lamps (by others).

**Lamp Holder** High heat porcelain, 4 KV rated with nickel plated copper center screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

**Canopy Set:** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Other lengths available. Finished to match housing.\*\*



**Surface Mount:** Aluminum 5/32" thick EZ5 splice box mounts to standard 4" octagonal junction box. Safety clip supports cylinder for hands free splice connection. Three #10-32 screws set 120° apart for twist and lock-up of cylinder to splice box. Supplied with quick-connect wiring harness. EZ5 design allows the contractor to install the fixture in 5 easy minutes or less. See illustration above. Finished same as housing. See finish note.

**Wall Bracket Assembly:** One-piece cast aluminum bracket /arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos EZ5 Mounting System allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

**Finish** Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors black, white and bronze. Custom colors are available. Consult factory or sales representative.

**Labels** Pendant mount suitable for damp location; wall mount suitable for wet location; surface mount suitable for wet location under covered ceiling. ETL, CETL and I.B.E.W. labeled.

**Fixture Warranty** The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See General Terms and Conditions.

**Photometric Information** Contact factory.


\*U.S. Patent No. D570035

\*\*Canopy set for indoor applications only; contact factory for other applications and designs.

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**



**Dimensions:**

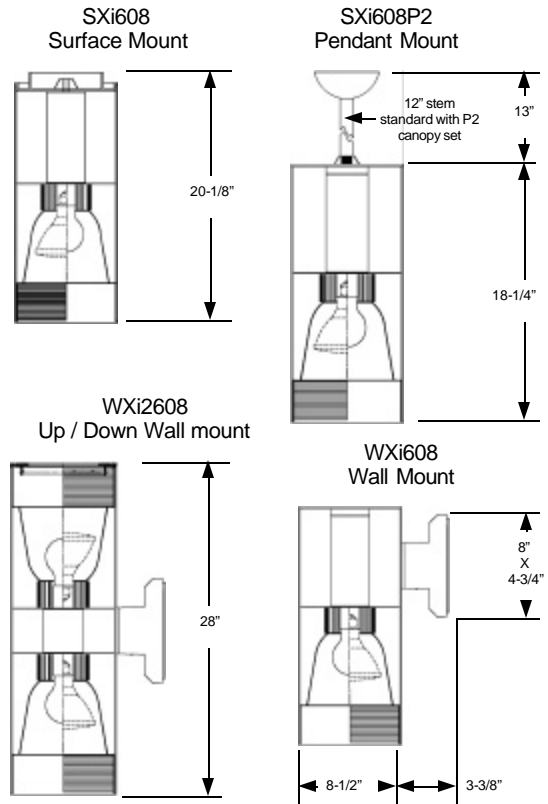

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
 Established 1975





## HOW TO ORDER

Catalog Number	Mounting System
<b>SXi608</b>	Surface Mount
<b>SXi608P2</b>	Pendant Mount
<b>WXi608</b>	Wall Mount
<b>WXi2608</b>	Up / Down Wall Mount

**EXAMPLE:** SX618FBLFP224 = 8" diameter cylinder, mini-groove black baffle, fuse and fuse holder, pendant mount with 24" stem, textured black

## OPTIONS AND ACCESSORIES

### Pendant Mount Suffix

P2=12" long stem (standard)  
 P2X="X" is custom stem length  
**EXAMPLE:** P224= 24" long stem.



### EZ5 Wall Mount

Change Prefix **S** to **W**.



### Photo Control

Suffix Catalog # With

**PC4** =120 Volt



### Fuse and Fuse Holder

Suffix Catalog Number With **F**



### Mini-Groove Black Baffle

Replace **60** in catalog number with **61**



### Louver Guard

Suffix catalog number with **LG2**.



### Color

Suffix Catalog Number With

**W**= White

**BZ**= Bronze

**BL**= Black



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**

**Established 1975**

