

**SPECIFICATIONS**

**Cylinder:** (2, 3 or 4) 6", 8" or 10" Dia. (1) 16" Dia. Roll formed and seam welded .080" aluminum. See finish note.

**16" Cylinder Aperture:** Cast aluminum lens frame with torsion spring lock-up. See cylinder aperture options.

**10" Cylinder Aperture:** Top, cast aluminum lens frame with clear glass lens. Bottom, cast aluminum lens frame with torsion spring lock-up. Bottom cylinder aperture options similar to 16" cylinder.

**6" & 8" Cylinder Aperture:** Top, cast aluminum lens frame with clear tempered glass lens, bottom open.

**Reflector:** .063" Spun aluminum #3002, polished to provide specular finish.

**Ballasts:** H.I.D. prewired C.W.A., metal halide multi-tap core and coil with capacitor and starter if required. Compact fluorescent electronic HPF class P 120V-277V.

**Lamp:** H.I.D / Incandescent phosphor coated medium or mogul base. Compact fluorescent 4-pin GX24q-4 base (by others).

**Lamp Holder:** H.I.D. / Incandescent high heat porcelain socket 4KV rated w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Compact fluorescent white thermoplastic base with snap in lamp retainer springs.

**Canopy Set:** 8" Diameter with 0-45° hang straight. Supplied with 3/4" stem length as required.

**Mounting Pan:** Cast aluminum with 3/4" inner collar. Finished same as cylinders.

**Finish:** Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked.



Standard colors black, white and bronze. Custom colors are available. Consult factory or sales representative.







**Labels:** ETL, CETL listed & I.B.E.W labeled; suitable for wet location under covered canopy installations.

**Fixture Warranty:** The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See General Terms and Conditions.


**Photometric Information:** Contact factory.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

**LENS SELECTION**

16" Cylinder Lens & Aperture Options		
 C73 tempered prismatic glass lens.	 Open splayed stepped baffle.	 Open downlight multiplier cone reflector.
 Fresnel glass lens on splayed stepped baffle.	 C73 glass lens on splayed step baffle.	 Fresnel glass lens on multiplier cone reflector.
 C73 glass lens on multiplier reflector.	 C73 glass lens on splayed baffle.	 Fresnel glass lens and splayed baffle.

**DIMENSIONS**

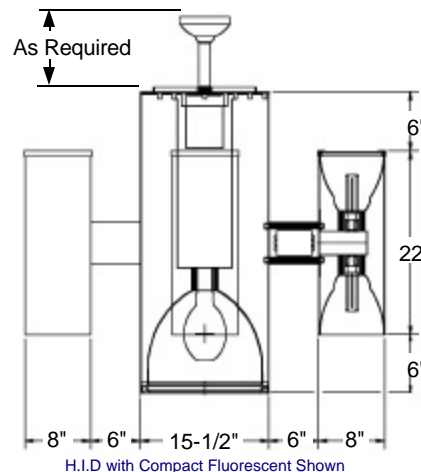

H.I.D with Compact Fluorescent Shown



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
**Established 1975**

