

ESCO LIGHTING, INC.

WPDIR SERIES

Five Minute Installation Wall Pack

***EZ5 Mounting Systems**

For **Recessed** Power Supply Installations

Sylvania ICETRON Induction Lamp

With Average Rated Life of 100,000 Hours

Dark Sky Friendly Lighting Fixture

SPECIFICATIONS

Housing: Die cast aluminum housing and door powder coat finished architectural bronze (contact factory for other colors). Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.

Reflector: Specular aluminum, designed for maximum efficiency.

Lens: Impact resistant tempered glass, silicone caulked to door frame.

Ballast: SYLVANIA QUICTRONIC® induction high frequency electronic ballast. See ordering information.

Lamp: OSRAM SYLVANIA ICETRON® lamp Inductively coupled electrodeless fluorescent lamp with average rated life 100,000 hours. See ordering information.

Mounting System: ***EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less (see illustration).

Labels: ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.

Photometric Information: Contact factory.

Ambient Temperature: Maximum 115°F.

ICETRON is a trademark and product of OSRAM SYLVANIA Inc.
QUICTRONIC is a registered trademark of OSRAM GmbH, used under license.
SYLVANIA is a registered trademark of OSRAM SYLVANIA Inc.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Application: Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

Recessed Junction Box Installation:

Cast aluminum mounting bracket factory installed. Universal cast aluminum gasketed junction box mounting bracket supports fixture and mounts to junction box. Fixture supplied with quick disconnect wiring harness for supply wire to fixture connection.




STEP 1. Connect quick connector to power supply.

STEP 2. Attach cast aluminum mounting plate on recessed j-box.

STEP 3. Connect quick connector from power source to fixture.

STEP 4. Hang wall pack on mounting plate.

STEP 5. Secure wall pack to mounting plate with locking screw.

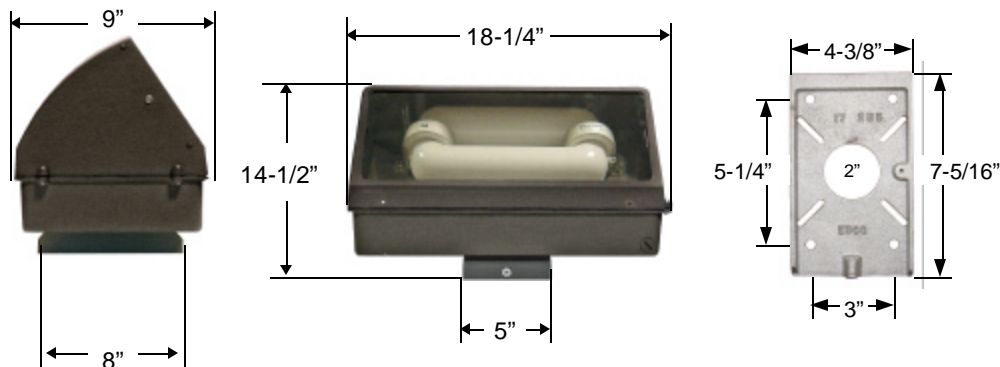

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975



WPDIR SERIES

Five Minute Installation Wall Pack

***EZ5 Mounting Systems**

For **Recessed** Power Supply Installations

Sylvania ICETRON Induction Lamp

With Average Rated Life of 100,000 Hours

Dark Sky Friendly Lighting Fixture

HOW TO ORDER

Catalog No.	Lamp	Ballast	Color Temp	Voltage Range	System Lumens
WPDI335R	ICE/70W	ICE/100W	3500K	120V—277V	6200
WPDI341R	ICE/70W	ICE/100W	4100K	120V—277V	6200
WPDI350R	ICE/70W	ICE/100W	5000K	120V—277V	5950
WPDI435R	ICE/100W	ICE/100W	3500K	120V—277V	8000
WPDI441R	ICE/100W	ICE/100W	4100K	120V—277V	8000
WPDI450R	ICE/100W	ICE/100W	5000K	120V—277V	7600
WPDI535R	ICE/100W	ICE/150W	3500K	120V—277V	11000
WPDI541R	ICE/100W	ICE/150W	4100K	120V—277V	11000
WPDI550R	ICE/100W	ICE/150W	5000K	120V—277V	11000



ICETRON® Lamp & Ballast System

OPTIONS & ACCESSORIES



Photo Control
Suffix Cat.# With

120 Volt =PC1

208-277 Volt =PC2

Fuse and Fuse
Holder

Suffix Catalog
Number With "F"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975

