

**SPECIFICATIONS**

**Housing:** Die cast aluminum housing and door powder coat finished architectural bronze (contact factory for other colors). Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.  
**Reflector:** Specular aluminum, designed for maximum efficiency.  
**Lens:** Impact resistant tempered glass, silicone caulked to door frame.  
**Ballast:** Philips QL induction high frequency electronic ballast. Operating in a range of 100V -120V or 220V-277V, see ordering information.  
**Mounting System:** \*EZ5 Mounting System allows the contractor to install the fixture in 5 minutes or less (see illustration).  
**Lamp:** Philips QL induction electrodeless fluorescent lamp with average rated life 100,000 hours. See ordering information.  
**Labels:** ETL, CETL listed suitable for wet location. I.B.E.W. labeled.  
**Fixture Warranty:** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.  
**Photometric Information:** Contact factory.




**Application:** Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**


**Surface Power Supply Installation:** Factory installed 12 gauge steel wall mounting brackets with 4 keyhole slots, finished the same as the housing. Cardboard template for locating the mounting brackets. Factory installed junction splice box, tapped for either 1/2" or 3/4" (must specify) liquid-tight connector suitable for wet location.



STEP 1. Mark wall with supplied template.    STEP 2. Start fasteners in wall.    STEP 3. Hang wall pack using keyhole slots.    STEP 4. Secure to wall.    STEP 5. Connect wall pack external j-box.

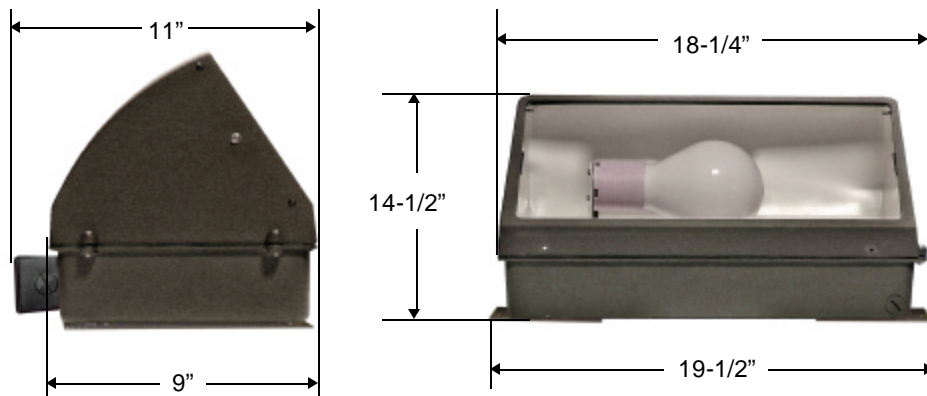

3254 North Kilbourn Avenue Chicago, IL 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
**A Woman-Owned Business**



# ESCO

## LIGHTING, INC.

**WPDQS SERIES**  
 Five Minute Installation Wall Pack  
**\*EZ5 Mounting Systems**  
 For **Surface** Power Supply Installations  
 Philips QL Induction Lamp  
 With Average Rated Life of 100,000 Hours  
 Dark Sky Friendly Lighting Fixture

### HOW TO ORDER

#### Surface Power Supply Mounting System

Catalog No.	Watts	Color Temp
WPDQ730S	55	3000k
WPDQ740S	55	4000k
WPDQ750S	55	5000k
WPDQ830S	85	3000k
WPDQ840S	85	4000k
WPDQ850S	85	5000k

#### Voltage Suffix

1=120V  
 2=208V  
 3=240V  
 4=277V



PHILIPS QL INDUCTION LAMP AND HIGH FREQUENCY ELECTRONIC BALLAST SYSTEM

### ACCESSORIES



**Photo Control**  
 Suffix Cat.# With

120 Volt =PC1  
 208-277 Volt =PC2



**Fuse and Fuse Holder**

Suffix Catalog Number With "F"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
 Established 1975

