



SPECIFICATIONS

Housing: Aluminum .090" thick, 8" diameter, fastened to a cast aluminum base with three countersunk stainless steel screws. See finish note.

Housing Top: Spun aluminum .090" thick, 8" diameter dome with a radius edge. See finish note.

Base: Cast aluminum, provided with three anchor bolts (3/8"-16 X 8 1/2" long) for securing to a poured concrete foundation. Finished same as housing. See finish note.

Lens: Injection molded, 8" diameter, 1/4" thick white or clear polycarbonate, sealed and bonded to the housing and housing top to form a clean one-piece assembly.

Ballast: 55 or 85 watt induction high frequency electronic ballast 120, 200—277 volt 50 or 60 Hz.

Lamp: 55 or 85 watt induction electrodeless fluorescent lamp with average rated life 100,000 hours.

Finish: Detergent cleaned, acid etched and alodine dipped. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard colors white or bronze. Custom colors are available. Contact factory.

Labels: ETL, CETL listed, suitable for wet location. I.B.E.W. labeled.


Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See general terms and conditions.

Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



DIMENSIONS

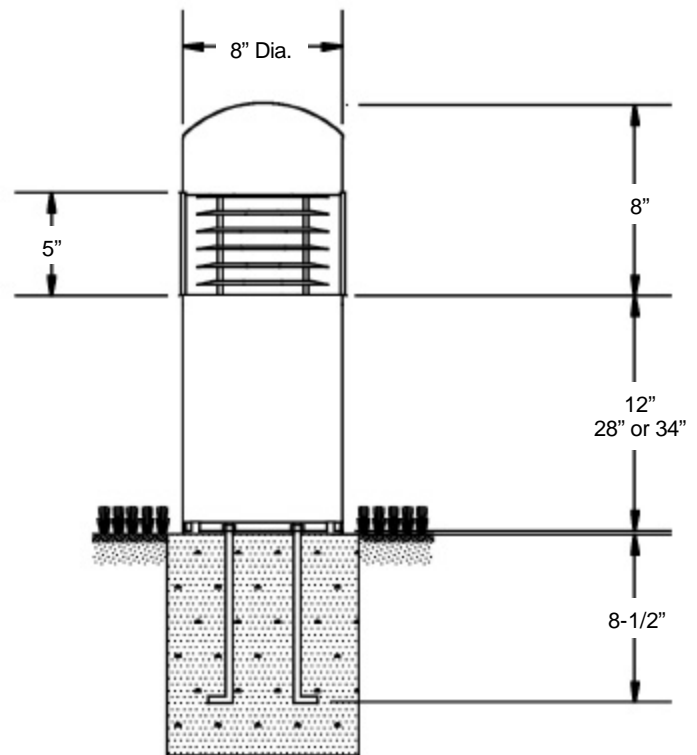

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
 Established 1975





ORDERING INFORMATION

Clear polycarbonate lens with glass refractor.



Catalog Number	Watts	Color Temp	Height
BF4C5530	55	3000k	20"
BF4C5541	55	4100k	20"
BF4C5550	55	5000k	20"
BF4C8530	85	3000k	20"
BF4C8541	85	4100k	20"
BF4C8550	85	5000k	20"
BF5C5530	55	3000k	36"
BF5C5541	55	4100k	36"
BF5C5550	55	5000k	36"
BF5C8530	85	3000k	36"
BF5C8541	85	4100k	36"
BF5C8550	85	5000k	36"
BF6C5530	55	3000k	42"
BF6C5541	55	4100k	42"
BF6C5550	55	5000k	42"
BF6C8530	85	3000k	42"
BF6C8541	85	4100k	42"
BF6C8550	85	5000k	42"

White diffused polycarbonate lens.



Catalog Number	Watts	Color Temp	Height
BF4D5530	55	3000k	20"
BF4D5541	55	4100k	20"
BF4D5550	55	5000k	20"
BF4D8530	85	3000k	20"
BF4D8541	85	4100k	20"
BF4D8550	85	5000k	20"
BF5D5530	55	3000k	36"
BF5D5541	55	4100k	36"
BF5D5550	55	5000k	36"
BF5D8530	85	3000k	36"
BF5D8541	85	4100k	36"
BF5D8550	85	5000k	36"
BF6D5530	55	3000k	42"
BF6D5541	55	4100k	42"
BF6D5550	55	5000k	42"
BF6D8530	85	3000k	42"
BF6D8541	85	4100k	42"
BF6D8550	85	5000k	42"

Clear polycarbonate lens with internal louver.



Catalog Number	Watts	Color Temp	Height
BF4L5530	55	3000k	20"
BF4L5541	55	4100k	20"
BF4L5550	55	5000k	20"
BF5L5530	55	3000k	36"
BF5L5541	55	4100k	36"
BF5L5550	55	5000k	36"
BF6L5530	55	3000k	42"
BF6L5541	55	4100k	42"
BF6L5550	55	5000k	42"

Color Suffix

BZ=Textured Bronze

W=Sky White

Other Consult Factory

EXAMPLE ORDER NUMBER: B4D5541W= 20" high, white diffused polycarbonate lens, induction 55 watt lamp, 4100k, sky white.



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975

