



SPECIFICATIONS

Mounting Frame: 18 gauge (.048") galvanized steel. Thru way splice box, adjustable mounting brackets fits most ceiling systems; minimum 1/2", maximum, 2".

Reflector: Spun aluminum .050" thick #3002, polished specular finish. Consult factory for other finishes.

Mini-groove Baffle: One piece spun aluminum, mini-groove finished Matte Black. Consult factory for other finishes.

Ballast: QL NEDAP 55watt Induction high frequency electronic ballast. Operating in a range of 100V—120V or 200V—277V, See ordering information.


Lamp: QL NEDAP 55watt induction electrodeless fluorescent lamp with average rated life 100,000 hours. See ordering information.

Labels: ETL, CETL listed, suitable for wet location under covered ceiling. I.B.E.W. labeled.


Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.

Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

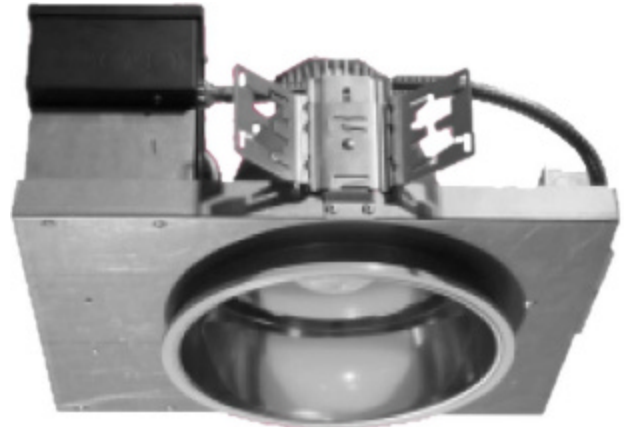

DIMENSIONS

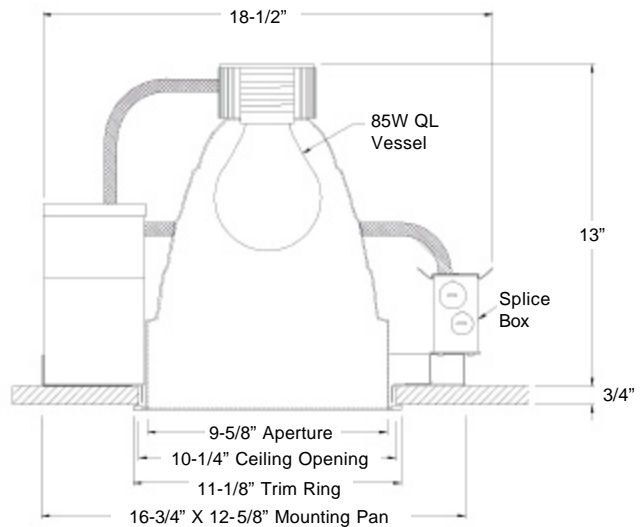

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
 Established 1975





HOW TO ORDER



| Architectural Open Downlight | Catalog Number | Watts | Color Temp | Initial Lumens | CRI | Voltage Suffix 1=120V 4=277V |
|-------------------------------------|-----------------------|--------------|-------------------|-----------------------|------------|---|
| | R150730 | 85W | 3000k | 6000 | 80 | |
| | R150740 | 85W | 4000k | 6000 | 80 | |
| | R150750 | 85W | 5000k | 6000 | 80 | |
| Mini-Groove Baffle Black* | Catalog Number | Watts | Color Temp | Initial Lumens | CRI | |
| | R151730 | 85W | 3000k | 6000 | 80 | |
| | R151740 | 85W | 4000k | 6000 | 80 | |
| | R151750 | 85W | 5000k | 6000 | 80 | |


EXAMPLE ORDER NUMBER: R151750= Induction 55 watt lamp, mini-groove black baffle, 5000k, 277 volt.

ACCESSORIES



Fuse and Fuse Holder
 Add suffix "F"
 to order number.

Louver Guard
 Suffix Catalog
 Number With
LG3



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
A Woman-Owned Business
 Established 1975

