



## SPECIFICATIONS

**Universal Mounting Frame:** 18 gauge (.048") galvanized steel die formed universal mounting frame. Feed thru junction box maximum of 8 number 12 AWG branch circuit conductors suitable for at least 60°C permitted in box.

**Reflector:** Spun aluminum .063" thick, #3002, polished to a specular finish.

**Ballast:** Philips QL induction high frequency electronic ballast. Operating in a range of 100 - 120 volts or 200 - 277 volts, 50 or 60 Hz.

**Lamp:** Philips QL induction electrodeless fluorescent lamp with average rated life 100,000 hours.

**Trim Frame:** Cast aluminum, gasketed, torsion spring lock-up. Finished Matte White. See finish note.

**Finish:** Detergent cleaned, and finished with chip resistant TGIC powder urethane polyester coating, electrostatic applied and baked.

**Fixture Warranty:** The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to




that manufacturer's warranty.

**Labels:** ETL / CETL listed, suitable for damp location & I.B.E.W. labeled.

**Photometric Information:** Contact factory.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

## DIMENSIONS

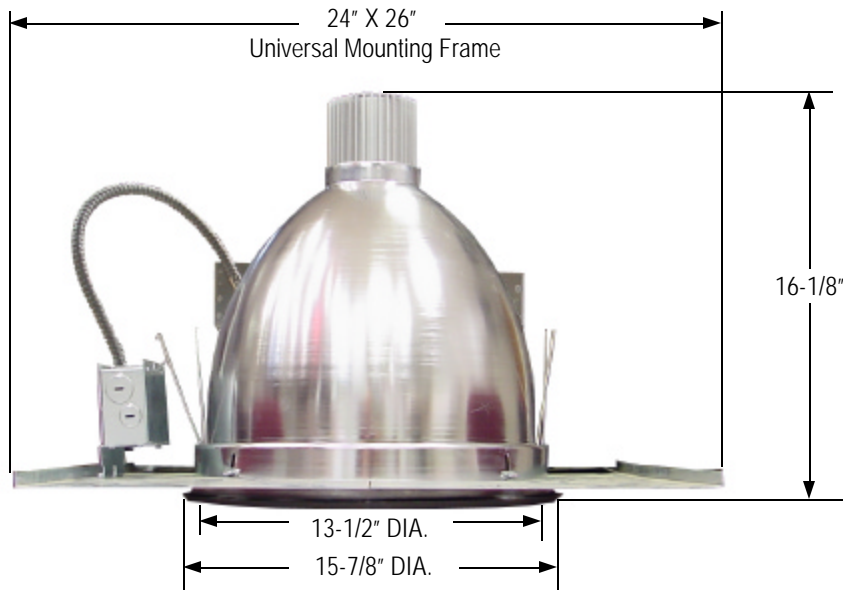

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**

**Established 1975**





## HOW TO ORDER

### Architectural Open Downlight



Catalog Number	Lamps	Color Temp
R30830	85w	3000k
R30840	85w	4000K
R30850	85w	5000K
R30930	165w	3000k
R30940	165w	4000K
R30950	165w	5000K

### Mini-Groove Black Baffle



Catalog Number	Lamps	Color Temp
R31830	85w	3000k
R31840	85w	4000k
R31850	85w	5000k
R31930	165w	3000k
R31940	165w	4000k
R31950	165w	5000k

### C73 Tempered Prismatic Glass Lens



Catalog Number	Lamps	Color Temp
R32830	85w	3000k
R32840	85w	4000K
R32850	85w	5000K
R32930	165w	3000k
R32940	165w	4000K
R32950	165w	5000K

### Voltage Suffix

- 1=120V
- 2=208V
- 3=240V
- 4=277V

**EXAMPLE ORDER NUMBER: R30730-1** = Clear Alzak\*, QL induction 55 watt lamp, 3000k, 120 volt.

## ACCESSORIES

### Fuse and Fuse Holder

Suffix Catalog Number With "F"



### Quartz Re-strike Systems

Suffix Catalog Number With



- E1A Mini-can socket assembly for separate circuit entry with relay system for one lamp burning only.
- E2 Emergency re-strike system, mini-can socket assembly (100—250 watt max. lamp).
- E65 Emergency re-strike system, mini-can socket assembly (100—250 watt max. lamp) with time delay relay.



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**  
**Established 1975**

