



SPECIFICATIONS

Universal Mounting Frame: 18 gauge (.048") galvanized steel die formed universal mounting frame. Feed thru junction box maximum of 8 number 12 AWG branch circuit conductors suitable for at least 60°C permitted in box.

Reflector: Spun aluminum .063" thick, #3002, polished to a specular finish.

Reflector Top: Extruded aluminum for maximum heat dissipation.

Ballast: 55 or 85 watt induction high frequency electronic ballast. Operating in a range of 120 - 277 volts, 50 or 60 Hz. See chart.

Lamp: 55 or 85 watt induction electrodeless fluorescent lamp with average rated life 100,000 hours. See chart.

Trim Frame: Cast aluminum, gasketed, torsion spring lock-up. Finished Matte White. See finish note.

Fixture Warranty: defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See general terms and conditions.

Labels: ETL / CETL listed, suitable for damp location & I.B.E.W. labeled.

Maximum Ambient Temperature: Maximum 119°F.


Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


Maximum Operating Ambient Temperature 48.3°C or 119°F



DIMENSIONS

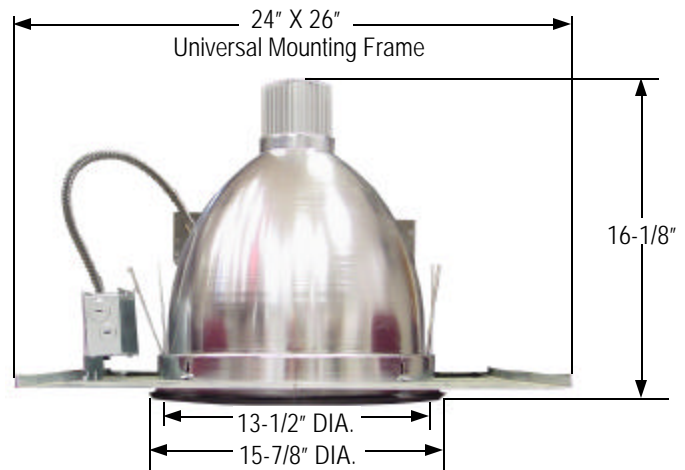

PHOTOMETRICS

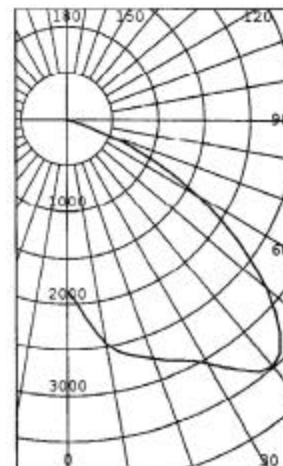


WBE City of Chicago Certified


3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975





HOW TO ORDER

Architectural Open Downlight	Catalog Number	Lamp	Color Temp	Initial Lumens	CRI
	RF30735	55w	3500K	4125	80
	RF30741	55w	4100K	4125	80
	RF30750	55w	5000K	4125	80
	RF30835	85w	3500K	6375	80
	RF30841	85w	4100K	6375	80
	RF30850	85w	5000K	6375	80

Mini-Groove Black Baffle	Catalog Number	Lamp	Color Temp	Initial Lumens	CRI
	RF31735	55w	3500K	4125	80
	RF31741	55w	4100K	4125	80
	RF31750	55w	5000K	4125	80
	RF31835	85w	3500K	6375	80
	RF31841	85w	4100K	6375	80
	RF31850	85w	5000K	6375	80

Voltage Suffix
1=120V
2=208V
3=240V
4=277V

EXAMPLE ORDER NUMBER: RF30735F-1 = Architectural Open, 55 watt induction lamp, 3500k, with fuse and fuse holder, 120 volt.

ACCESSORIES



Fuse and Fuse Holder
 Suffix Catalog Number With "F"

Louver Guard
 Suffix Catalog Number With LG3



WBE City of Chicago Certified
 3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com
Established 1975

