

SPECIFICATIONS

Housing: 20 GA. (.036") C.R.S. or stainless steel #304-B die formed and welded construction. See ordering information. Painted Sky White. See finish note.

Reflector: .030" aluminum elliptical shape. Painted Sky White. See finish note.

Door Frame: 20 gauge (.036") C.R.S. or stainless steel #304-B gasketed with captive, countersunk fastener, concealed stainless steel hinging, painted Sky White. See Finish Note.

Ballast: Core and coil constant wattage autotransformer, high power factor with capacitor. Stainless steel supplied with epoxy filled core and coil.

Lamp: Clear, medium base (by others).

Lamp Holder: Hi-heat porcelain, 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.


Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard color Sky White. Custom colors are available. Consult factory or sales representative.

Labels: ETL, CETL listed & I.B.E.W labeled; suitable for wet location under covered ceiling.

Fixture Warranty The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See General Terms and Conditions.


Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

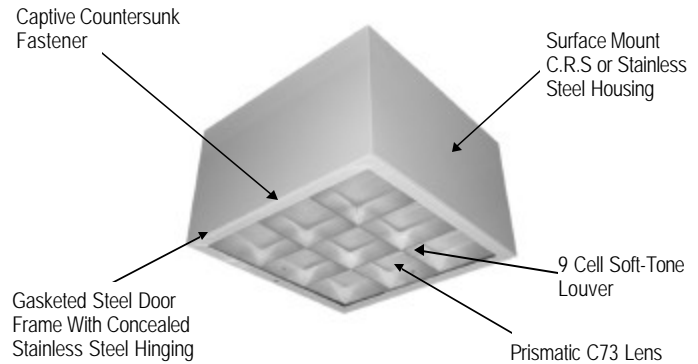

S5600 C73 Lens With 9 Cell Soft-Tone Louver Shown

Dimensions

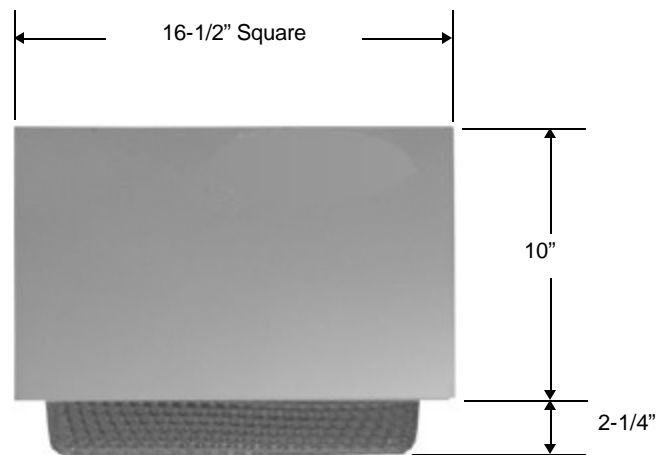

S5200 Drop Acrylic Lens Shown



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975



Ordering Information

S5000 Series 16" square with C73 prismatic tempered glass lens.



For stainless steel housing replace S in catalog number with SS.

S5100 Series 16" square with regressed C73 prismatic tempered glass lens.



For stainless steel housing replace S in catalog number with SS.

S5200 Series 16" square with acrylic prismatic drop lens.



For stainless steel housing replace S in catalog number with SS.


Catalog Number	Watts	Light Source
S5013	70	HPS
S5014	100	HPS
S5015	150	HPS
S5023	70	MH
S5024	100	MH
S5025	150	MH
S5026	175	MH

S5300 Series 16" square with poly-carbonate prismatic drop lens.



For stainless steel housing replace S in catalog number with SS.

S5600 Series 16" square with C73 prismatic tempered glass lens and 9 cell soft-tone parabolic louver.



For stainless steel housing replace S in catalog number with SS.

Catalog Number	Watts	Light Source
S5313	70	HPS
S5314	100	HPS
S5315	150	HPS
S5323	70	MH
S5324	100	MH
S5325	150	MH
S5326	175	MH

Catalog Number	Watts	Light Source
S5613	70	HPS
S5614	100	HPS
S5615	150	HPS
S5623	70	MH
S5624	100	MH
S5625	150	MH
S5626	175	MH

Options & Accessories



16" Sq. wire guard option.
Suffix catalog number with WG11.

Fuse and Fuse Holder
Suffix Catalog Number With "F".



Photo Control Option
Suffix Catalog # With



PC4 120 Volt
PC5 208-277 Volt

TPS Tamper proof screwdriver.



Tamper proof screw option
suffix catalog number with TP.



12" Pendant mount for 24" square.
Suffix catalog number with P1xx. xx= Stem length in inches.

Suffix Catalog Number

Quartz Re-strike Systems

- E1A Mini-can socket assembly for separate circuit entry with relay system for one lamp burning only.
- E2 Emergency re-strike system, mini-can socket assembly (100-150 watt max).
- E65 Emergency re-strike system, mini-can socket assembly (100-150 watt max). Time delay relay.



Low noise epoxy filled ballast. Suffix catalog number with "EX".