

SPECIFICATIONS

Housing: 20 GA. (.036") C.R.S. or stainless steel #304-B die formed and welded construction. See ordering information. Painted Sky White. See finish note.

Reflector: .030" aluminum elliptical shape. Painted Sky White. See finish note.

Door Frame: 20 gauge (.036") C.R.S. or stainless steel #304-B gasketed with two captive, countersunk fasteners, concealed stainless steel hinging, painted Sky White. See Finish Note.

Ballast: Core and coil constant wattage autotransformer, high power factor with capacitor. Stainless steel supplied with epoxy filled core and coil.

Lamp: Clear, mogul base (by others).

Lamp Holder: Hi-heat porcelain, 4 K.V. rated, w/ nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.



Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electrostatic applied and baked. Standard color Sky White. Custom colors are available. Consult factory or sales representative.

Labels: ETL, CETL listed & I.B.E.W labeled; suitable for wet location under covered ceiling. Wall mount listed wet location.

Fixture Warranty The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. See General Terms and Conditions.

Photometric Information: Contact factory.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

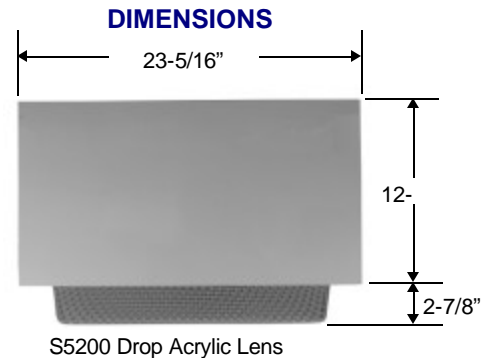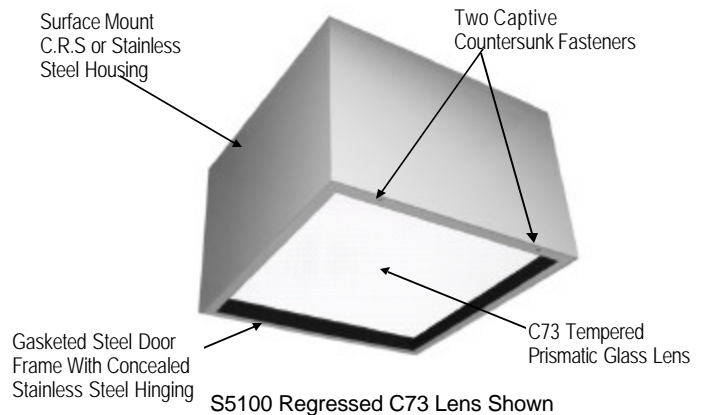

Ordering Information

S5000 Series 24" square with C73 prismatic tempered glass lens.



Catalog Number	Watts	Light Source
S501524	150	HPS
S5017	250	HPS
S5018	400	HPS
S502624	175	MH
S5027	250	MH
S50225	250	MH/PS
S50232	320	MH/PS
S50235	350	MH/PS
S5028	400	MH
S50240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.

Ordering Information continued on next page



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975



Ordering Information Continued

S5100 Series 24" square with regressed C73 prismatic tempered glass lens.



Catalog Number	Watts	Light Source
S511524	150	HPS
S5117	250	HPS
S5118	400	HPS
S512624	175	MH
S5127	250	MH
S51225	250	MH/PS
S51232	320	MH/PS
S51235	350	MH/PS
S5128	400	MH
S51240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.

S5200 Series 24" square with acrylic prismatic drop lens.



Catalog Number	Watts	Light Source
S521524	150	HPS
S5217	250	HPS
S5218	400	HPS
S522624	175	MH
S5227	250	MH
S52225	250	MH/PS
S52232	320	MH/PS
S52235	350	MH/PS
S5228	400	MH
S52240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.

S5500 Series 24" square with C73 prismatic tempered glass lens and 16 cell parabolic louver.



Catalog Number	Watts	Light Source
S5515	150	HPS
S5517	250	HPS
S5518	400	HPS
S5526	175	MH
S5527	250	MH
S55225	250	MH/PS
S55232	320	MH/PS
S55235	350	MH/PS
S5528	400	MH
S55240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.


S5300 Series 24" square with polycarbonate prismatic drop lens.



Catalog Number	Watts	Light Source
S531524	150	HPS
S5317	250	HPS
S5318	400	HPS
S532624	175	MH
S5327	250	MH
S53225	250	MH/PS
S53232	320	MH/PS
S53235	350	MH/PS
S5328	400	MH
S53240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.

S5600 Series 24" square with C73 prismatic tempered glass lens and 9 cell parabolic louver.

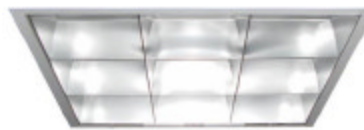

Catalog Number	Watts	Light Source
S561524	150	HPS
S5617	250	HPS
S5618	400	HPS
S562624	175	MH
S5627	250	MH
S56225	250	MH/PS
S56232	320	MH/PS
S56235	350	MH/PS
S5628	400	MH
S56240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.

S5900 Series 2x2 lay-in with acrylic Triumph 1 control lens.



Catalog Number	Watts	Light Source
S5915	150	HPS
S5917	250	HPS
S5918	400	HPS
S5926	175	MH
S5927	250	MH
S59225	250	MH/PS
S59232	320	MH/PS
S59235	350	MH/PS
S5928	400	MH
S59240	400	MH/PS

For stainless steel housing replace S in catalog number with SS.

Options & Accessories



Suffix Catalog # With

PC4 120 Volt
PC5 208-277 Volt



Low noise epoxy filled ballast. Suffix catalog number with "EX".



Fuse and Fuse Holder Suffix Catalog Number With "F".



24" Sq. wire guard option. Suffix catalog number with WG21.

TPS Tamper proof screwdriver.



Tamper proof screw option suffix catalog number with TP.

Suffix Catalog Number

Quartz Re-strike Systems

- E1A Mini-can socket assembly for separate circuit entry with relay system for one lamp burning only.
- E2 Emergency re-strike system, mini-can socket assembly (100-150 watt max).
- E65 Emergency re-strike system, mini-can socket assembly (100-150 watt max). Time delay relay.



12" Pendant mount for 24" square. Suffix catalog number with P1xx. xx= Stem length in inches.