

## SPECIFICATIONS

**Cylinder** .080" Aluminum, rolled and seam welded. See finish note.

**Reflector** .040" Thick polished to specular finish, anodized and sealed.

**Ballast** Electronic ballast operates 120-277V range, thermally protected, sound rated A.

**Lamp** Medium base metal halide 20W-70W.

**Lamp Holder** High heat porcelain, 4 KV rated with nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

**Mounting Pan** (Surface Mount & Pendant Mount)

Cast aluminum with 3/4" inner collar, finished to match cylinder housing.

**Mounting Strap** (Surface Mount) Galvanized steel, mounts directly to outlet box. Supports pan with 8-32 studs and nuts. Flush style.

**Canopy Set** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Finished to match housing.\*\*

**Wall Bracket** (Wall Mount) One-piece cast aluminum bracket/arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Esco's **EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less.

**Finish** Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors black, white and bronze. Custom colors are available. Consult factory or sales representative.

**Labels** Surface and wall mount suitable for wet location; pendant mount suitable for damp location. ETL, CETL and I.B.E.W. labeled.

**Fixture Warranty** The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See General Terms and Conditions.


**Photometric Information** Contact Factory.

\*\*Canopy set for indoor applications only; contact factory for other applications and designs.

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**



**Dimensions:**

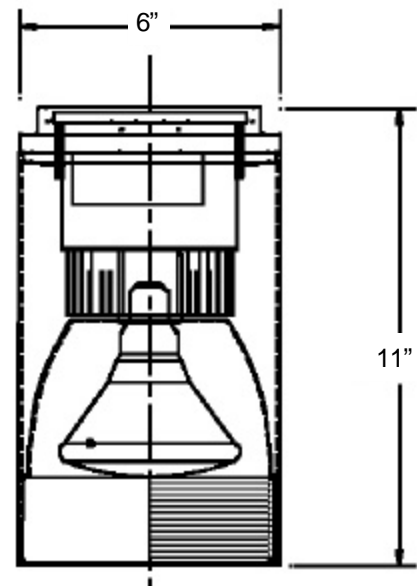

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)


**A Woman-Owned Business**

**Established 1975**

3/09



## Ordering Information

	Catalog Number With Mini-Groove Baffle	Catalog Number Open	Watts	Light Source	Lamp Base
	S6120EPAR	S6020EPAR	20 PAR30	MH 156/O	Medium
	S6121EPAR	S6021EPAR	39 PAR20	MH 130/O	Medium
	S6121EPAR	S6021EPAR	39 PAR30	MH 130/O	Medium
	S6123EPAR	S6023EPAR	70 PAR30	MH 139/O	Medium
	S6123EPAR	S6023EPAR	70 PAR38	MH 139/O	Medium

**Voltage Suffix** 1=120V 2=208V 3=240V 4=277V 5=480V 8=Multi-tap wired for 277V. 9=Multi-tap unwired. 0=347V

**Color Suffix** W=White BZ=Bronze BL=Black For other colors consult factory

## Options & Accessories

### Pendant Mount Suffix

P2=12" long stem (standard)  
P2X="X" is custom stem length  
**EXAMPLE:** P224= 24" long stem.



### Photo Control

Suffix Catalog # With

PC4 =120 Volt

PC5 =277 Volt



### Fuse and Fuse Holder

Suffix Catalog Number With F




### EZ5 Wall Mount

Change Prefix S to W.



### Louver Guard

Suffix catalog number with LG3.



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)

**A Woman-Owned Business**

**Established 1975**

