

SPECIFICATIONS

Cylinder: .080" Aluminum, rolled and seam welded. See finish note.

Reflector: Spun aluminum #3002, polished to a mirror finish then electro-chemically processed to provide specular finish.

Ballast: Two Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

Lamp Holder: Angle mounted white thermoplastic with snap-in lamp retainer.

Lamp: 3 or 4 Compact fluorescent PLT lamp max. 42W, 4 pin base (by others).

Cylinder Trim Frame: Cast aluminum with torsion spring lock-up. See finish note.

Wall Mounting Pan: Cast aluminum bolted to cylinder with (3) 1/4"-20x1/2" long stainless steel pan head screws. Supports optical assembly and ballast.

Surface Mounting Pan: Same as wall except has 3/4" inner collar with 8-1/2" square 16 gauge galvanized mounting bracket that bolts to cast aluminum pan with (4) 1/4"x1-3/4" long studs and cast wing nuts. Supports cylinder to ceiling. Mounting holes and slots for attaching to supply junction box and ceiling.

Pendant Mounting Pan: Same as wall except has cast aluminum pipe flange bolted to top for supporting stem assembly to cast aluminum pan.

Canopy Set: (Pendant Mount) 0-45° hang straight with 3/4" x 12" long steel pipe standard length with P1 accessory. Finished to match housing.**

Wall Bracket: (Wall Mount) One-piece cast aluminum bracket / arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Escos's **EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

Finish: Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors textured black, white and textured bronze. Custom colors are available. Consult factory or sales representative.

Labels: Surface and pendant mount suitable for damp location; wall mount suitable for wet location. ETL, CETL and I.B.E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. Contact factory for lamp and ballast warranty.

Photometric Information: Contact factory.

**Canopy set for indoor applications only; contact factory for other applications and designs.




Surface Mount


Pendant Mount

Wall Mount

DIMENSIONS

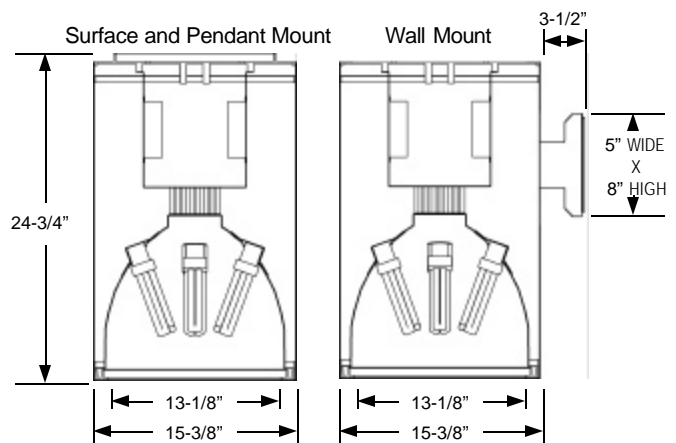

PHOTOMETRICS

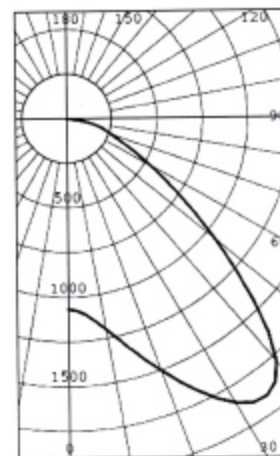

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
 Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975

11/11



HOW TO ORDER

Open Downlight*



Catalog Number	Watts	Light Source	Lumens
SA703T5	128W	3-CFL	9,600
SA704T5	170W	4-CFL	12,800

*Includes clear tempered glass lens in aperture.

Tempered C73 Prismatic Glass Lens



Catalog Number	Watts	Light Source	Lumens
SA713T5	128W	3-CFL	9,600
SA714T5	170W	4-CFL	12,800

OPTIONS AND ACCESSORIES

Photo Control

Suffix Catalog # With

PC4 =120 Volt
PC5 =277 Volt



EZ5 Wall Mount

Change Prefix **S** to **W**.



Pendant Mount Suffix

P1=12" long stem (standard)
P1X="X" is custom stem length
EXAMPLE: P124= 24" long

Wire Guard

Suffix catalog number with **WG155**



Ballast Options

EM= Emergency Ballast
DM= Dimming Ballast

Color
Suffix Catalog Number With
W= White
BZ= Bronze
BL= Black

Fuse and Fuse Holder

Suffix Catalog Number With **F**



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business
Established 1975

11/11

