



SP2396 Series
Aluminum Low Profile
Compact Fluorescent
Surface Mount Luminaire

Specifications

Housing

Die formed .050" aluminum welded construction. Finish painted sky white. Custom colors available. Contact factory or sales representative. See finish note.

Door Frame

20 gauge (.036") gasketed stainless steel die formed with countersunk fastener. Concealed stainless steel hinging finished same as housing. See finish note.

Reflector

.030" aluminum, computer designed faceted specular reflector, 95% surface reflectance.

Lens

C73 prismatic tempered glass lens. Other lens options available. Contact factory or sales representative.

Ballast

Electronic compact fluorescent, class P sound rating 120V-277V 60Hz.

Lamp

Two 26W, 32W or 42W PLT compact fluorescent (by others). See ordering information.

Lamp Holder

White thermoplastic body with snap-in retainer. Type GX24q-4 base.

Finish


Detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

Labels


U/L, CU/L listed, suitable for damp location. I.B.E.W. labeled.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SP2396



Dimensional Information

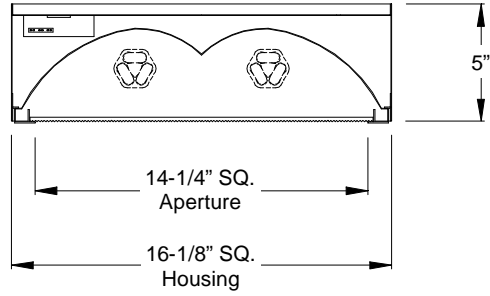

Ordering Information

Catalog Number	Lamp Wattage
SP2396A	(2) PLT26
SP2396B	(2) PLT32
SP2396C	(2) PLT42

