



### SPECIFICATIONS

**Cylinder:** Extruded aluminum 6063-T5, .090" thick.\* See finish note.

**Reflector:** .040" Thick polished to specular finish, anodized and sealed.

**Lamp:** Incandescent, up to 150w PAR lamp in up light, up to 250w PAR lamp in down light (by others).

**Lamp Holder:** High heat porcelain, 4 KV rated with nickel plated copper screw shell, spring loaded center contact, lamp grips, SF-2 leads (200° C). Impregnated gasket.

**Canopy Set:** (Pendant Mount) 0-45° hang straight for 3/8" x 12" long steel pipe standard length with P2 accessory. Other lengths available. Finished to match housing.\*



**Surface Mount:** Cast Aluminum 5/32" thick EZ5® splice box mounts to standard 4" octagonal junction box. Safety clip supports cylinder for hands free splice connection. Three #10-32 screws set 120° apart for twist and lock-up of cylinder to splice box. Supplied with quick-connect wiring harness. EZ5® design allows the contractor to install the fixture in 5 easy minutes or less. See illustration above. Finished same as housing. See finish note.

**Wall Bracket Assembly:** One-piece cast aluminum bracket /arm assembly with access plate for wire inspection. Cast aluminum, wall mounting plate with 1/4" thick neoprene gasket. Quick disconnect wiring harness. Esco's EZ5® Mounting System allows the contractor to install the fixture in 5 minutes or less. Finished same as housing. See finish note.

**Finish:** Detergent cleaned with iron phosphate and chromic acid rust inhibitor. Chip resistant powder urethane polyester coating, electro-static applied and baked. Standard colors black, white and bronze. Custom colors are available. Consult factory or sales representative.


**Labels:** Pendant mount suitable for damp location; wall mount suitable for wet location; surface mount suitable for wet location under covered ceiling. ETL, CETL and I.B.E.W. labeled.

**Fixture Warranty:** The fixture mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for ten years from date of shipment from the factory. See General Terms and Conditions.

**Photometric Information:** Contact factory.

\*Canopy set for indoor applications only; contact factory for other applications and designs.

### Dimensions:

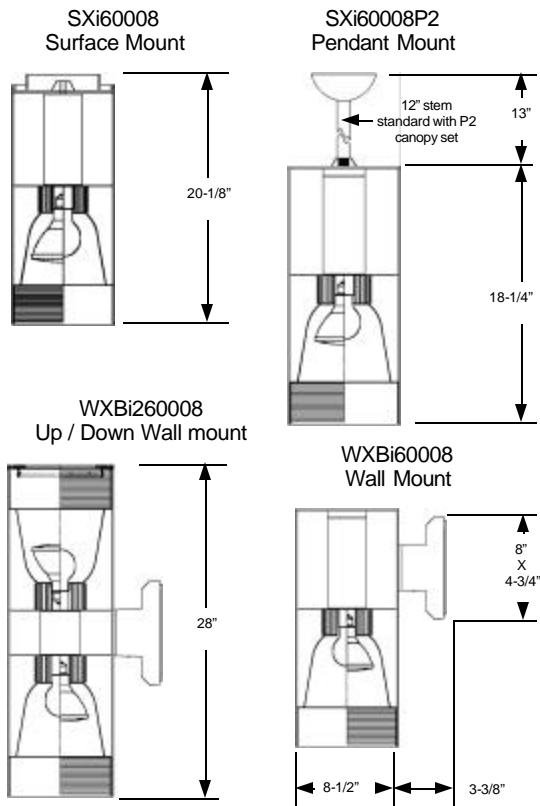

**WBE City of Chicago Certified**

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
**Established 1975**












## HOW TO ORDER

Catalog Number	Mounting System	Maximum Wattage	Color Suffix Catalog Number With
<b>SXi60008</b>	Surface Mount	250 watt maximum incandescent lamp	White= <b>W</b>
<b>SXi60008P2</b>	Pendant Mount	250 watt maximum incandescent lamp	Bronze= <b>BZ</b>
<b>WXBi60008</b>	Wall Mount	250 watt maximum incandescent lamp	Black= <b>BL</b>
<b>WXBi260008</b>	Up / Down Wall Mount	250 watt maximum incandescent lamp	

**EXAMPLE:** SXi61008BLFP224 = 8" diameter cylinder, mini-groove black baffle, fuse and fuse holder, pendant mount with 24" stem, textured black

## OPTIONS AND ACCESSORIES

Aperture Accessories	
	<b>Mini-Groove Black Baffle</b> Replace <b>60</b> in catalog number with <b>61</b> <b>Example:</b> SXi60008 becomes SXi61008
	<b>Louver Guard</b> Suffix catalog number with <b>LG1</b> <b>Example:</b> SXi60008 becomes SXi60008LG1
Mounting Options	
	<b>Trunion mount</b> Change <b>S</b> in catalog number to <b>T</b> <b>Example:</b> SXi60008 becomes TXi60008
	<b>Pendant Mount Suffix</b> P2=12" long stem (standard) P2X="X" is custom stem length <b>Example:</b> P224= 24" long stem
	<b>EZ5® Wall Mount</b> Change Prefix <b>SX</b> to <b>WXB</b> <b>Example:</b> SXi60008 becomes WXBi60008
Other	
	<b>Photo Control</b> Suffix Catalog number with 120 Volt = <b>PC4</b> 208-277 Volt = <b>PC5</b> <b>Example:</b> SXi60008 becomes SXi60008PC5
	<b>Fuse and Fuse Holder</b> Suffix Catalog Number With <b>F</b> <b>Example:</b> SXi60008 becomes SXi60008F



**WBE City of Chicago Certified**

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505  
 Phone: 773-427-7000 Fax: 800-217-1260 [www.escolighting.com](http://www.escolighting.com)  
 Established 1975

