



SPECIFICATIONS

Housing: Die cast aluminum housing and door powder coat finished architectural bronze (contact factory for other colors). Hinged door frame with two captive lock-up screws, one-piece silicone self-attaching door sealing gasket.

Reflector: Specular aluminum, designed for maximum efficiency.

Lens: Impact resistant tempered glass, silicone caulked to door frame.

Ballast: SYLVANIA QUICTRONIC® induction high frequency electronic ballast. See ordering information.

Lamp: OSRAM SYLVANIA ICETRON® lamp Inductively coupled electrodeless fluorescent lamp with average rated life 100,000 hours. See ordering information.

Mounting System: ***EZ5 Mounting System** allows the contractor to install the fixture in 5 minutes or less (see illustration).

Labels: ETL, CETL listed suitable for wet location. I.B.E.W. labeled.

Fixture Warranty: The mechanics are guaranteed to be free from defective material and workmanship, under normal installation and operating conditions, for five years from date of shipment from the factory. All induction system components are warranted by the original manufacturer of the induction lighting system components, and subject to that manufacturer's warranty.

Photometric Information: Contact factory.

Ambient Temperature: Maximum 115°F.

ICETRON is a trademark and product of OSRAM SYLVANIA Inc.
QUICTRONIC is a registered trademark of OSRAM GmbH, used under license.
SYLVANIA is a registered trademark of OSRAM SYLVANIA Inc.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE




Application: Ideal for parking areas, entrances, walkways, underpasses, loading docks and tunnels.

Surface Power Supply Installation: Factory installed 12 gauge steel wall mounting brackets with 4 keyhole slots, finished the same as the housing. Cardboard template for locating the mounting brackets. Factory installed junction splice box, tapped for either 1/2" or 3/4" (must specify) liquid-tight connector suitable for wet location.



STEP 1. Mark wall with supplied template.



STEP 2. Start fasteners in wall.





STEP 3. Hang wall pack using keyhole slots.



STEP 4. Secure to wall.



STEP 5. Connect wall pack external j-box.

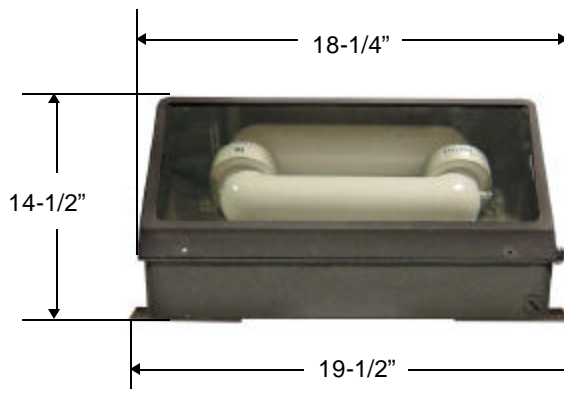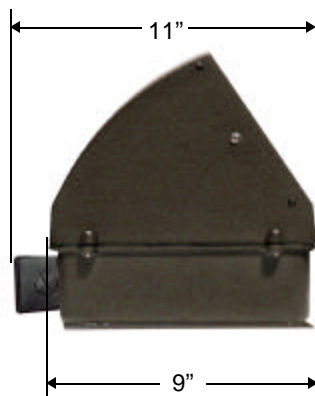

3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975



WPDIS SERIES

Five Minute Installation Wall Pack

***EZ5 Mounting Systems**

For **Surface** Power Supply Installations

Sylvania ICETRON Induction Lamp

With Average Rated Life of 100,000 Hours

Dark Sky Friendly Lighting Fixture



HOW TO ORDER

Catalog No.	Lamp	Ballast	Color Temp	Voltage Range	System Lumens
WPDI335S	ICE/70W	ICE/100W	3500K	120V—277V	6815
WPDI341S	ICE/70W	ICE/100W	4100K	120V—277V	6815
WPDI350S	ICE/70W	ICE/100W	5000K	120V—277V	6616
WPDI435S	ICE/100W	ICE/100W	3500K	120V—277V	8600
WPDI441S	ICE/100W	ICE/100W	4100K	120V—277V	8600
WPDI450S	ICE/100W	ICE/100W	5000K	120V—277V	830
WPDIZ535S*	ICE/100W	ICE/150W	3500K	120V—277V	11900
WPDIZ541S*	ICE/100W	ICE/150W	4100K	120V—277V	11900
WPDIZ550S*	ICE/100W	ICE/150W	5000K	120V—277V	11450

*Includes an internally mounted AC axial fan with die-cast aluminum housing, and thermoplastic impeller. Two 1" louvered aluminum vent plugs for maximum heat dissipation.



ICETRON® Lamp & Ballast System

OPTIONS & ACCESSORIES



Photo Control
Suffix Cat.# With

120 Volt =PC1

208-277 Volt =PC2

Fuse and Fuse Holder

Suffix Catalog Number With "F"



3254 North Kilbourn Avenue Chicago, Illinois 60641-4505
Phone: 773-427-7000 Fax: 800-217-1260 www.escolighting.com

A Woman-Owned Business

Established 1975

